

# Go Pro 50 S | 15W

## Product Reference

Environment Indoor

Installation Ceiling Surface

## Construction & Materials

Housing Die Cast Aluminium

Primary Lens PMMA

Primary Reflector -

Secondary Reflector Anodised

Body Finish White,Black,Custom

Diffuser -

Antiglare Baffle -

## Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling

## Optical System

Beam Direction Fixed

Tilt No

Swivel No

## Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included


Mounting Integral

LED Power Watts 12.4W


System Power Watts 14.2W

Operating Voltage Vin -

Power Factor p.f. &gt; 0.95



## Light Distribution

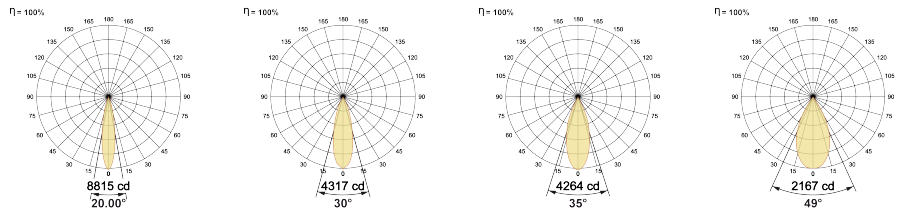

## LED Technology

Binning 3 Step MacAdam

LED Life Time @ L70/B10 &gt;50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type COB

LED Fitted CREE COB LED 36Vdc/350mA

## Controls

Standard Switchable On/Off

Optional Non Dimmable

## Ordering Details

| Code Example: | Name               | Watt       | CCT          | CRI          | Angle          | Finish     | Control       |
|---------------|--------------------|------------|--------------|--------------|----------------|------------|---------------|
|               | <b>Go Pro 50 S</b> | <b>15W</b> | <b>WW27K</b> | <b>CRI80</b> | <b>20°(SS)</b> | <b>SWH</b> | <b>On/Off</b> |

Select one from each column with highlighted values to create the ordering code

| NAME               | WATT       | LUMEN | EFFICACY | CCT          | CRI          | ANGLE          | FINISH     | CONTROL                    |
|--------------------|------------|-------|----------|--------------|--------------|----------------|------------|----------------------------|
| <b>Go Pro 50 S</b> | <b>15W</b> | 1392  | 98       | 2700K        | <b>WW27K</b> | <b>CRI80</b>   | White      | Non Dimmable <b>On/Off</b> |
|                    |            | 1434  | 101      | 3000K        | <b>WW30K</b> | CRI90          | Black      |                            |
|                    |            | 1505  | 106      | 4000K        | <b>NW40K</b> |                | Custom     |                            |
|                    |            | 1534  | 108      | 5700K        | <b>CW57K</b> |                | <b>CSM</b> |                            |
| <b>Go Pro 50 S</b> | <b>15W</b> |       |          | <b>WW27K</b> | <b>CRI80</b> | <b>20°(SS)</b> | <b>SWH</b> | <b>On/Off</b>              |