

Halo | 15W

Product Reference

Environment Indoor

Installation Ceiling Recess

Construction & Materials

Housing Spun Aluminium

Primary Lens -

Primary Reflector -

Secondary Reflector -

Body Finish White,Black,Custom

Diffuser Premium high-transmission opal

Antiglare Baffle -

Thermal Management

Heat Sink Material Aluminium

Cooling Technique Passive Cooling

Optical System

Beam Direction General Diffuse

Tilt No

Swivel No

Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included


Mounting Remote

LED Power Watts 12.9W


System Power Watts 14.8W

Operating Voltage Vin 220-240 Vac

Power Factor p.f. > 0.95

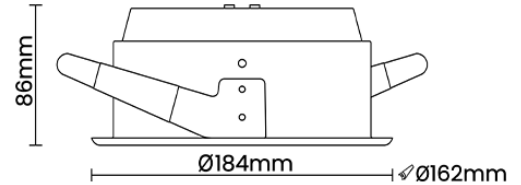

Light Distribution



LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type SMD mid power

LED Fitted Osram/Samsung Mid power LED array 23V-27Vdc/500mA

Controls

Standard Switchable On/Off

Optional PDIM,DDIM,CASAMBI,Non Dimmable

Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	Halo	15W	WW27K	CRI80	93°	SWH	On/Off

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT	CRI	ANGLE	FINISH	CONTROL			
Halo	15W	1154	78	2700K	WW27K	93°	White	SWH	Non Dimmable	On/Off	
		1184	80	3000K	WW30K		CRI90	Black	SBL	Phase Dimmable	PDIM
		1243	84	4000K	NW40K		Custom	CSM	Dali Dimmable	DDIM	
		1273	86	5700K	CW57K		Casambi	CBTM			
				2700K-5700K	TW						
Halo	15W			WW27K	CRI80	93°	SWH	On/Off			

