

# Skylight 14 | 30W

## Product Reference

Environment Indoor  
 Installation Ceiling Recess

## Construction & Materials

Housing Mild Steel  
 Primary Lens -  
 Primary Reflector -  
 Secondary Reflector -  
 Body Finish -  
 Diffuser Premium high-transmission opal  
 Antiglare Baffle -

## Thermal Management




Heat Sink Material CRCA  
 Cooling Technique Passive Cooling

## Optical System

Beam Direction General Diffuse  
 Tilt No  
 Swivel No

## Electrical System

Driven with Constant Current Driver  
 Input Voltage/Hz 220V- 240V/50-60Hz  
 Control Gear Included  
 Mounting Remote  
 LED Power Watts 24.9W  
 System Power Watts 28.6W  
 Operating Voltage Vin 220-240 Vac  
 Power Factor p.f. > 0.95

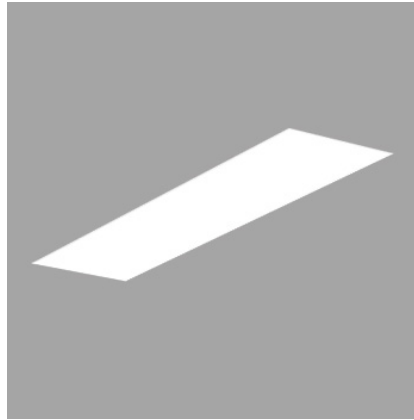

## LED Technology

Binning 3 Step MacAdam  
 LED Life Time @ L70/B10 >50000 hours  
 Colour Rendering (CRI) CRI80,CRI90  
 Led Type SMD mid power  
 LED Fitted Samsung Mid power LED array 30V-36Vdc/700mA

## Controls

Standard Switchable On/Off  
 Optional PDIM,DDIM,BTTM,CASAMBI,Non Dimmable

## Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	<b>Skylight 14</b>	<b>30W</b>	<b>WW27K</b>	<b>CRI80</b>	<b>105°</b>		<b>On/Off</b>

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT	CRI	ANGLE	FINISH	CONTROL	
<b>Skylight 14</b>	<b>30W</b>	2831	99	2700K	<b>WW27K</b>	105°		Non Dimmable	<b>On/Off</b>
		2946	103	3000K	<b>WW30K</b>			Phase Dimmable	<b>PDIM</b>
		3117	109	4000K	<b>NW40K</b>			Dali Dimmable	<b>DDIM</b>
		3175	111	5700K	<b>CW57K</b>			Bluetooth Dimmable	<b>BTTM</b>
								Casambi	<b>CBTM</b>
<b>Skylight 14</b>	<b>30W</b>			<b>WW27K</b>	<b>CRI80</b>	<b>105°</b>		<b>On/Off</b>	