

Skylight MPD 22 | 30W

Product Reference

Environment Indoor
 Installation Ceiling Recess

Construction & Materials

Housing Mild Steel
 Primary Lens -
 Primary Reflector -
 Secondary Reflector -
 Body Finish White
 Diffuser Microprismatic
 Antiglare Baffle -

Thermal Management



Heat Sink Material CRCA
 Cooling Technique Passive Cooling

Optical System


Beam Direction General Diffuse
 Tilt No
 Swivel No

Electrical System

Driven with Constant Current Driver
 Input Voltage/Hz 220V- 240V/50-60Hz
 Control Gear Included
 Mounting Remote
 LED Power Watts 23.1W
 System Power Watts 26.5W
 Operating Voltage Vin 220-240 Vac
 Power Factor p.f. > 0.95

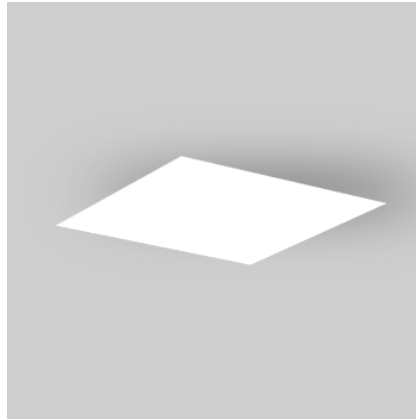

Light Distribution



LED Technology

Binning 3 Step MacAdam
 LED Life Time @ L70/B10 >50000 hours
 Colour Rendering (CRI) CRI80,CRI90
 Led Type SMD mid power
 LED Fitted Samsung Mid power LED array 30V-36Vdc/700mA

Controls

Standard Switchable On/Off
 Optional PDIM,DDIM,BTTM,CASAMBI,Non Dimmable

Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	Skylight MPD 22	30W	WW27K	CRI80	78°	SWH	On/Off

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT		CRI	ANGLE	FINISH		CONTROL	
Skylight MPD 22	30W	2359	89	2700K	WW27K	CRI80	78°	White	SWH	Non Dimmable	On/Off
		2465	93	3000K	WW30K	CRI90				Phase Dimmable	PDIM
		2624	99	4000K	NW40K					Dali Dimmable	DDIM
		2677	101	5700K	CW57K					Bluetooth Dimmable	BTTM
				2700K-5700K	TW					Casambi	CBTM
Skylight MPD 22	30W			WW27K		CRI80	78°	SWH		On/Off	