

# Helix 25 | 15W

## Product Reference

Environment Outdoor

Installation Floor Surface

## Construction & Materials

Housing Die Cast Aluminium, Extruded Aluminium

Primary Lens -

Primary Reflector -

Secondary Reflector -

Body Finish Black, Grey

Diffuser Opal PC

Antiglare Baffle -

## Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling

## Optical System

Beam Direction Fixed

Tilt No

Swivel No

## Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included



Mounting Integral

LED Power Watts 12.6W


System Power Watts 14.5W

Operating Voltage Vin 220-240 Vac

Power Factor p.f. > 0.95

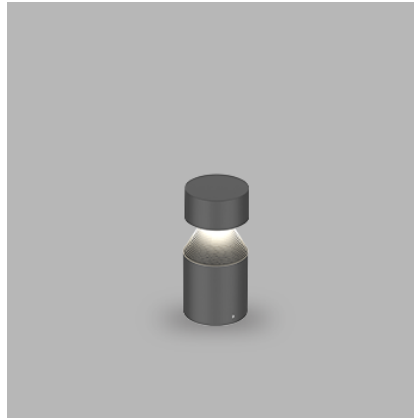

## Light Distribution



## LED Technology

Binning 3 Step MacAdam

LED Life Time @ L70/B10 >50000 hours

Colour Rendering (CRI) CRI80, CRI90

Led Type SMD mid power

LED Fitted -

## Controls

Standard Switchable On/Off

Optional PDIM, DDIM, BTM, CASAMBI, Non Dimmable

## Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	<b>Helix 25</b>	<b>15W</b>	<b>WW27K</b>	<b>CRI80</b>	<b>126°</b>	<b>SBL</b>	<b>On/Off</b>

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT	CRI	ANGLE	FINISH	CONTROL	
<b>Helix 25</b>	<b>15W</b>	464	32	2700K	<b>WW27K</b>	126°	Black	Non Dimmable <b>On/Off</b> Phase Dimmable <b>PDIM</b> Dali Dimmable <b>DDIM</b> Bluetooth Dimmable <b>BTTM</b> Casambi <b>CBTM</b>	
		479	33	3000K	<b>WW30K</b>		Grey		<b>GGT</b>
		508	35	4000K	<b>NW40K</b>				
		522	36	5700K	<b>CW57K</b>				
<b>Helix 25</b>	<b>15W</b>			<b>WW27K</b>	<b>CRI80</b>	<b>126°</b>	<b>SBL</b>	<b>On/Off</b>	