

# Henri | 8W

## Product Reference

Environment Outdoor

Installation Floor Surface

## Construction & Materials

Housing Die Cast Aluminium, Extruded Aluminium

Primary Lens Polycarbonate

Primary Reflector -

Secondary Reflector -

Body Finish Black, Grey

Diffuser -

Antiglare Baffle -

## Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling

## Optical System

Beam Direction Fixed

Tilt No

Swivel No

## Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included


Mounting Integral

LED Power Watts 7.6W


System Power Watts 8.7W

Operating Voltage  $V_{in}$  220-240 Vac

Power Factor p.f. > 0.95

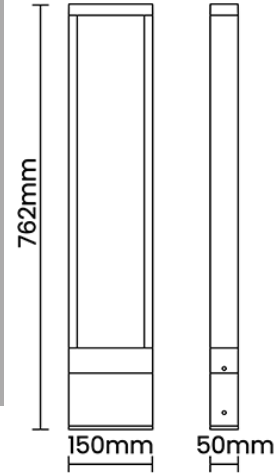

## Light Distribution



## LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 >50000 hours

Colour Rendering (CRI) CRI80, CRI90

Led Type SMD mid power

LED Fitted Samsung Mid power LED array 32V-36Vdc/200mA

## Controls

Standard Switchable On/Off

Optional Non Dimmable

## Ordering Details

| Code Example: | Name  | Watt | CCT   | CRI   | Angle | Finish | Control |
|---------------|-------|------|-------|-------|-------|--------|---------|
|               | Henri | 8W   | WW27K | CRI80 | 85°   | SBL    | On/Off  |

Select one from each column with highlighted values to create the ordering code

| NAME  | WATT | LUMEN | EFFICACY | CCT   | CRI   | ANGLE | FINISH | CONTROL      |
|-------|------|-------|----------|-------|-------|-------|--------|--------------|
| Henri | 8W   | 548   | 63       | 2700K | WW27K | 85°   | Black  | Non Dimmable |
|       |      | 566   | 65       | 3000K | WW30K |       | Grey   |              |
|       |      | 592   | 68       | 4000K | NW40K |       | GGT    |              |
|       |      | 609   | 70       | 5700K | CW57K |       |        |              |
| Henri | 8W   |       |          | WW27K | CRI80 | 85°   | SBL    | On/Off       |

