
ABBY LIGHTING

220V 240V 50/60Hz | CRI 80 | IP65 | L80B10 >50,000h | MacAdam Step 3 | Swivel

Optional: Dimmable | CRI 90

Heron | 8W



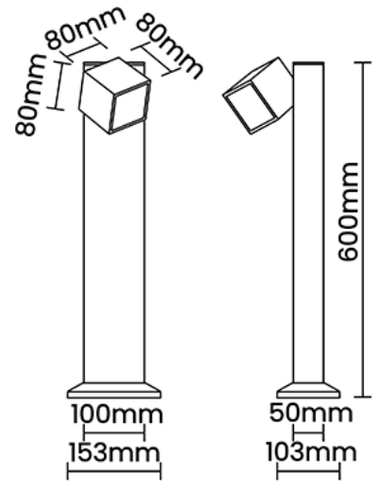

Product Reference

Environment Indoor

Installation Floor Surface

Construction & Materials

Housing Die Cast Aluminium,Extruded Aluminium

Primary Lens Tempered Glass Visor

Primary Reflector -

Secondary Reflector -

Body Finish Black,Grey

Diffuser -

Antiglare Baffle -

Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling

Optical System

Beam Direction Fixed

Tilt No

Swivel Yes

Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included

Mounting Integral


LED Power Watts 6.9W

System Power Watts 7.9W

Operating Voltage Vin 220-240 Vac

Power Factor p.f. > 0.95

Light Distribution



LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 >50000 hours

Colour Rendering (CRI) CRI90

Led Type SMD mid power

LED Fitted -

Controls

Standard Switchable On/Off

Optional DDIM,Non Dimmable

Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	Heron	**8W**	**WW27K**	**CRI90**	**66°**	**SBL**	**On/Off**

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT		CRI	ANGLE	FINISH		CONTROL	
Heron	**8W**	316	40	2700K	**WW27K**	**CRI90**	66°	Black	**SBL**	Non Dimmable	**On/Off**
		324	41	3000K	**WW30K**			Grey	**GGT**	Dali Dimmable	**DDIM**
		340	43	4000K	**NW40K**						
		356	45	5700K	**CW57K**						
Heron	**8W**			**WW27K**		**CRI90**	**66°**	**SBL**		**On/Off**	

Abby Lighting & Switchgear Limited 802 A, Fortune Terraces, New Link Road, Opp City Mall, Andheri West, Mumbai - 400053, India.

frontdesk@abbylighting.com, +91 7304623220

www.abbylighting.com

Abby reserves the right to discontinue any product from its collection at any time whatsover and without prior notice