

ABBY LIGHTING

220V 240V 50/60Hz | CRI 80 | IP65 | L80B10 >50,000h | MacAdam Step 3

Optional: Bluetooth | Dimmable | CRI 90

Husky 25 | 15W

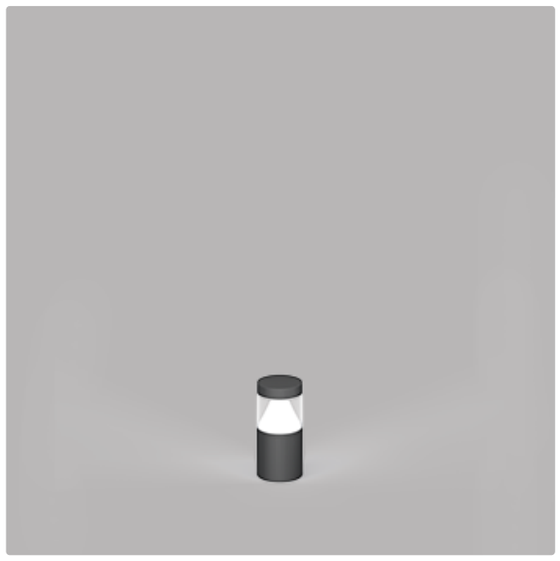



Product Reference

Environment Outdoor

Installation Floor Surface

Construction & Materials

Housing Die Cast Aluminium,Extruded Aluminium

Primary Lens -

Primary Reflector Aluminium White Painted

Secondary Reflector -

Body Finish Black,Grey

Diffuser Clear PC

Antiglare Baffle -

Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling

Optical System

Beam Direction Fixed

Tilt No

Swivel No

Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included

Mounting Integral


LED Power Watts 12.5W

System Power Watts 14.4W

Operating Voltage Vin 220-240 Vac

Power Factor p.f. > 0.95

Light Distribution



LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type SMD mid power

LED Fitted -

Controls

Standard Switchable On/Off

Optional PDIM,DDIM,BTTM,CASAMBI,Non Dimmable

Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	Husky 25	**15W**	**WW27K**	**CRI80**	**140°**	**SBL**	**On/Off**

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT		CRI	ANGLE	FINISH		CONTROL	
Husky 25	**15W**	1339	93	2700K	**WW27K**	**CRI80**	140°	Black	**SBL**	Non Dimmable	**On/Off**
		1382	96	3000K	**WW30K**	CRI90		Grey	**GGT**	Phase Dimmable	**PDIM**
		1469	102	4000K	**NW40K**					Dali Dimmable	**DDIM**
		1512	105	5700K	**CW57K**					Bluetooth Dimmable	**BTTM**
										Casambi	**CBTM**
Husky 25	**15W**			**WW27K**		**CRI80**	**140°**	**SBL**		**On/Off**	