

Hugo 75 | 8W

Product Reference

Environment Outdoor

Installation Floor Surface

Construction & Materials

Housing Die Cast Aluminium, Extruded Aluminium

Primary Lens Polycarbonate

Primary Reflector -

Secondary Reflector -

Body Finish Black, Grey

Diffuser -

Antiglare Baffle -

Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling

Optical System

Beam Direction Fixed

Tilt No

Swivel No

Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included


Mounting Integral

LED Power Watts 7.5W


System Power Watts 8.6W

Operating Voltage Vin 220-240 Vac

Power Factor p.f. > 0.95

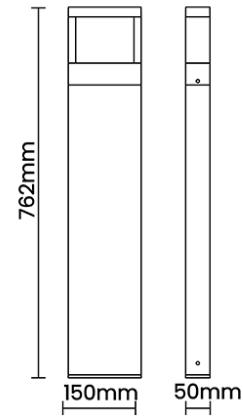

Light Distribution



LED Technology

Binning 3 Step MacAdam

LED Life Time @ L70/B10 >50000 hours

Colour Rendering (CRI) CRI80, CRI90

Led Type SMD mid power

LED Fitted Samsung Mid power LED array 32V-36Vdc/200mA

Controls

Standard Switchable On/Off

Optional Non Dimmable

Ordering Details

| Code Example: | Name | Watt | CCT | CRI | Angle | Finish | Control |
|---------------|----------------|-----------|--------------|--------------|-------------|------------|---------------|
| | Hugo 75 | 8W | WW27K | CRI80 | 120° | SBL | On/Off |

Select one from each column with highlighted values to create the ordering code

| NAME | WATT | LUMEN | EFFICACY | CCT | | CRI | ANGLE | FINISH | | CONTROL | |
|----------------|-----------|-------|----------|--------------|--------------|--------------|-------------|------------|------------|---------------|---------------|
| Hugo 75 | 8W | 490 | 57 | 2700K | WW27K | CRI80 | 120° | Black | SBL | Non Dimmable | On/Off |
| | | 507 | 59 | 3000K | WW30K | CRI90 | | Grey | GGT | | |
| | | 533 | 62 | 4000K | NW40K | | | | | | |
| | | 542 | 63 | 5700K | CW57K | | | | | | |
| Hugo 75 | 8W | | | WW27K | | CRI80 | 120° | SBL | | On/Off | |