
ABBY LIGHTING

220V 240V 50/60Hz | IP65 | L80B10 >50,000h | MacAdam Step 2 | Tilt | UGR<16 | CRI 90

iGraze 120 | 40W



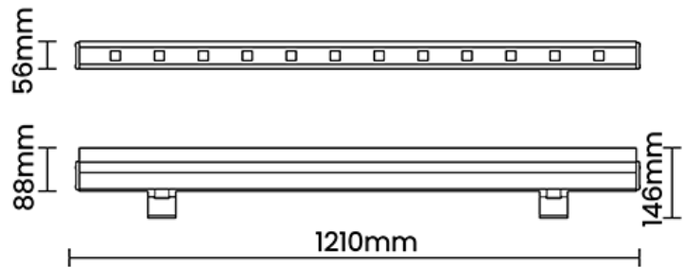

Product Reference

Environment Outdoor

Installation Ceiling Surface,Floor Surface,Wall Surface,Wall Surface

Construction & Materials

Housing Extruded and Die Cast Aluminium

Primary Lens PMMA,Tempered Glass Visor

Primary Reflector -

Secondary Reflector -

Body Finish Anodised Aluminium

Diffuser -

Antiglare Baffle -

Thermal Management

Heat Sink Material Aluminium

Cooling Technique Passive Cooling

Optical System

Beam Direction Adjustable

Tilt Yes

Swivel No

Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included

Mounting Integral


LED Power Watts 31.5W

System Power Watts 36.2W

Operating Voltage Vin 220-240 Vac

Power Factor p.f. > 0.95

Light Distribution



LED Technology

Binning 2 Step MacAdam

LED Life Time @ L80/B10 >50000 hours

Colour Rendering (CRI) CRI90

Led Type SMD high power

LED Fitted -

Controls

Standard Switchable On/Off

Optional Non Dimmable

Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	iGraze 120	**40W**	**WW27K**	**CRI90**	**21°x9° REC**	**AL**	**On/Off**

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT		CRI	ANGLE	FINISH		CONTROL	
iGraze 120	**40W**	2498	69	2700K	**WW27K**	**CRI90**	21°x9° REC	Anodised Aluminium	**AL**	Non Dimmable	**On/Off**
		2606	72	3000K	**WW30K**						
		2824	78	4000K	**NW40K**						
		2932	81	5700K	**CW57K**						
iGraze 120	**40W**			**WW27K**		**CRI90**	**21°x9° REC**	**AL**		**On/Off**	

Abby Lighting & Switchgear Limited 802 A, Fortune Terraces, New Link Road, Opp City Mall, Andheri West, Mumbai - 400053, India.
frontdesk@abbylighting.com, +91 7304623220

Abby reserves the right to discontinue any product from its collection at any time whatsover and without prior notice