

Wallop Unidirectional | 15W

Product Reference

Environment Outdoor
 Installation Wall Surface, Wall Surface

Construction & Materials

Housing Die Cast Aluminium
 Primary Lens Tempered Glass Visor
 Primary Reflector White Polymer
 Secondary Reflector Silver Painted Polymer
 Body Finish White, Black, Custom
 Diffuser -
 Antiglare Baffle -

Thermal Management



Heat Sink Material Die cast Aluminium
 Cooling Technique Passive Cooling

Optical System

Beam Direction Fixed
 Tilt No
 Swivel No

Electrical System

Driven with Constant Current Driver
 Input Voltage/Hz 220V- 240V/50-60Hz
 Control Gear Included
 Mounting Integral
 LED Power Watts 13.0W
 System Power Watts 14.9W
 Operating Voltage Vin 220-240 Vac
 Power Factor p.f. > 0.95

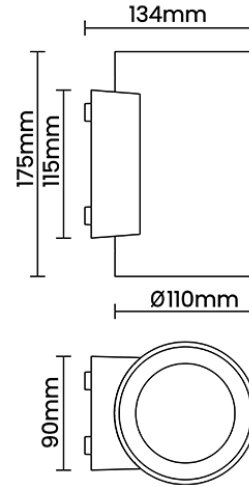

LED Technology

Binning 3 Step MacAdam
 LED Life Time @ L70/B10 >50000 hours
 Colour Rendering (CRI) CRI80, CRI90
 Led Type COB
 LED Fitted CREE COB LED 36Vdc/350mA

Controls

Standard Switchable On/Off
 Optional DDIM, Non Dimmable

Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	Wallop Unidirectional	15W	WW27K	CRI80	80°	SWH	On/Off

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT		CRI	ANGLE	FINISH		CONTROL	
Wallop Unidirectional	15W	1147	77	2700K	WW27K	CRI80	80°	White	SWH	Non Dimmable	On/Off
		1177	79	3000K	WW30K	CRI90		Black	SBL	Dali Dimmable	DDIM
		1267	85	4000K	NW40K			Custom	CSM		
		1281	86	5700K	CW57K						
						Warm to Dim		W2D			
Wallop Unidirectional	15W			WW27K		CRI80	80°	SWH		On/Off	

