
ABBY LIGHTING

220V 240V 50/60Hz | CRI 80 | IP65 | L80B10 >50,000h | MacAdam Step 3

Optional: Dimmable | Warm to Dim | CRI 90

Wallop Unidirectional | 15W



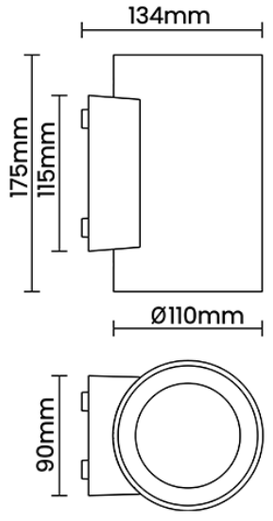

Product Reference

Environment Outdoor

Installation Wall Surface,Wall Surface

Construction & Materials

Housing Die Cast Aluminium

Primary Lens Tempered Glass Visor

Primary Reflector White Polymer

Secondary Reflector Silver Painted Polymer

Body Finish White,Black,Custom

Diffuser -

Antiglare Baffle -

Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling

Optical System

Beam Direction Fixed

Tilt No

Swivel No

Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included

Mounting Integral


LED Power Watts 13.0W

System Power Watts 14.9W

Operating Voltage Vin 220-240 Vac

Power Factor p.f. > 0.95

Light Distribution



LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type COB

LED Fitted CREE COB LED 36Vdc/350mA

Controls

Standard Switchable On/Off

Optional DDIM,Non Dimmable

Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	Wallop Unidirectional	**15W**	**WW27K**	**CRI80**	**80°**	**SWH**	**On/Off**

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT		CRI	ANGLE	FINISH		CONTROL	
Wallop Unidirectional	**15W**	1147	77	2700K	**WW27K**	**CRI80**	80°	White	**SWH**	Non Dimmable	**On/Off**
		1177	79	3000K	**WW30K**	CRI90		Black	**SBL**	Dali Dimmable	**DDIM**
		1267	85	4000K	**NW40K**			Custom	**CSM**		
		1281	86	5700K	**CW57K**						
				Warm to Dim	**W2D**						
Wallop Unidirectional	**15W**			**WW27K**		**CRI80**	**80°**	**SWH**		**On/Off**	