

Wallop Unidirectional | 15W

Product Reference

Environment Outdoor

Installation Wall Surface, Wall Surface

Construction & Materials

Housing Die Cast Aluminium

Primary Lens Tempered Glass Visor


Primary Reflector White Polymer

Secondary Reflector Silver Painted Polymer

Body Finish White, Black, Custom

Diffuser -

Antiglare Baffle -

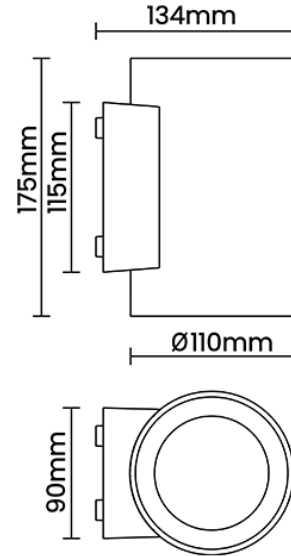

Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling


Optical System

Beam Direction Fixed

Tilt No

Swivel No

Light Distribution



Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included

Mounting Integral

LED Power Watts 13.0W

System Power Watts 14.9W

Operating Voltage Vin 220-240 Vac

Power Factor p.f. > 0.95

LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 >50000 hours

Colour Rendering (CRI) CRI80, CRI90

Led Type COB

LED Fitted CREE COB LED 36Vdc/350mA

Controls

Standard Switchable On/Off

Optional DDIM, Non Dimmable

Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	Wallop Unidirectional	15W	WW27K	CRI80	80°	SWH	On/Off

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT	CRI	ANGLE	FINISH	CONTROL	
Wallop Unidirectional	15W	1147	77	2700K	WW27K	80°	White	Non Dimmable	
		1177	79	3000K	WW30K		CRI90	Black	Dali Dimmable
		1267	85	4000K	NW40K		Custom	CSM	
		1281	86	5700K	CW57K				
							Warm to Dim	W2D	

NAME	WATT	LUMEN	EFFICACY	CCT	CRI	ANGLE	FINISH	CONTROL
Wallop Unidirectional	15W			WW27K	CRI80	80°	SWH	On/Off

Abby Lighting & Switchgear Limited 802 A, Fortune Terraces, New Link Road, Opp City Mall, Andheri West, Mumbai - 400053, India.

frontdesk@abbylighting.com, +91 9833645212

Abby reserves the right to discontinue any product from its collection at any time whatsoever and without prior notice

www.abbylighting.com