

Go Pro 35 HGB | 10W

Product Reference

Environment Indoor
Installation Track Mounted

Construction & Materials

Housing Die Cast Aluminium
Primary Lens PMMA
Primary Reflector -
Secondary Reflector Anodised
Body Finish White,Black
Diffuser -
Antiglare Baffle -

Thermal Management

Heat Sink Material Die cast Aluminium
Cooling Technique Passive Cooling

Optical System

Beam Direction Adjustable
Tilt Yes
Swivel Yes

Electrical System



Driven with Constant Current Driver
Input Voltage/Hz 220V- 240V/50-60Hz
Control Gear Included
Mounting Integral
LED Power Watts 8.7W
System Power Watts 10.0W
Operating Voltage Vin 220-240 Vac
Power Factor p.f. > 0.95

Ordering Details


Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	Go Pro 35 HGB	10W	WW27K	CRI80	29°(MD)	SWH	On/Off

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT	CRI	ANGLE	FINISH	CONTROL	
Go Pro 35 HGB	10W	990	99	2700K	WW27K	CRI80	29°(MD)	White SWH	Non Dimmable On/Off
		1020	102	3000K	WW30K	CRI90	37°(WD)	Black SBL	Phase Dimmable PDIM
		1070	107	4000K	NW40K		56°(VWD)		Dali Dimmable DDIM
		1090	109	5700K	CW57K				Bluetooth Dimmable BTTM
				2700K-5700K	TW				Casambi CBTM
				Warm to Dim	W2D				
Go Pro 35 HGB	10W			WW27K	CRI80	29°(MD)	SWH	On/Off	

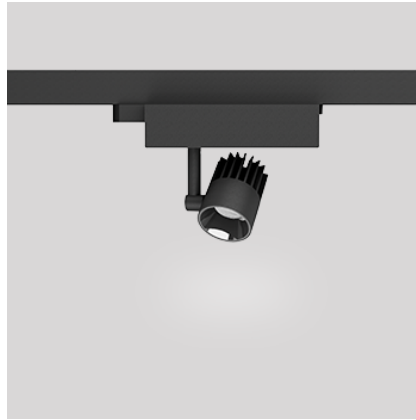

Light Distribution

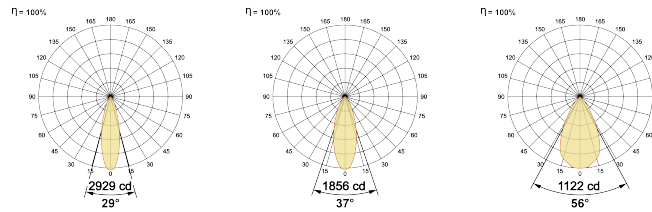

LED Technology

Binning 3 Step MacAdam
LED Life Time @ L70/B10 >50000 hours
Colour Rendering (CRI) CRI80,CRI90
Led Type COB
LED Fitted CREE COB LED 36Vdc/250mA

Controls

Standard Switchable On/Off
Optional PDIM,DDIM,BTTM,CASAMBI,Non Dimmable