

Ovo Carbon TA | 15W

Product Reference

Environment Indoor
Installation Track Mounted

Construction & Materials

Housing Aluminium
Primary Lens PMMA
Primary Reflector PC metallised
Secondary Reflector -
Body Finish White,Black
Diffuser -
Antiglare Baffle -

Thermal Management

Heat Sink Material Die cast Aluminium
Cooling Technique Passive Cooling

Optical System

Beam Direction Adjustable
Tilt Yes
Swivel Yes

Electrical System


Driven with Constant Current Driver
Input Voltage/Hz 220V- 240V/50-60Hz
Control Gear Included
Mounting Integral
LED Power Watts 12.8W
System Power Watts 14.7W
Operating Voltage Vin 220-240 Vac
Power Factor p.f. > 0.95

Ordering Details


Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	Ovo Carbon TA	15W	WW27K	CRI80	22°(SS)	SWH	On/Off

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT	CRI	ANGLE	FINISH	CONTROL
Ovo Carbon TA	15W	1312	89	2700K	WW27K	CRI80	22°(SS)	White SWH Non Dimmable On/Off
		1352	92	3000K	WW30K	CRI90	29°(MD)	Black SBL Phase Dimmable PDIM
		1447	98	4000K	NW40K		51°(WD)	Dali Dimmable DDIM
		1474	100	5700K	CW57K			
						Warm to Dim W2D		
Ovo Carbon TA	15W			WW27K	CRI80	22°(SS)	SWH	On/Off



Light Distribution

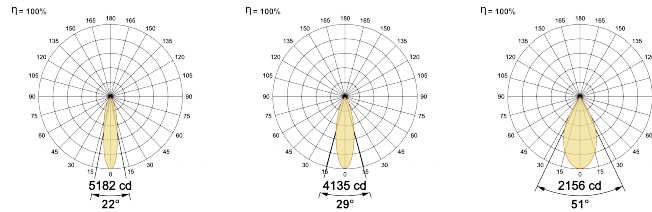

LED Technology

Binning 3 Step MacAdam
LED Life Time @ L80/B10 >50000 hours
Colour Rendering (CRI) CRI80,CRI90
Led Type COB
LED Fitted CREE COB LED 36Vdc/700mA

Controls

Standard Switchable On/Off
Optional PDIM,DDIM,Non Dimmable