

# Look Around 48V | 12.6W

## Product Reference

Environment Indoor

Installation Track Mounted

## Construction & Materials

Housing Die Cast Aluminium

Primary Lens PMMA

Primary Reflector PC metallised

Secondary Reflector -

Body Finish White,Black

Diffuser -

Antiglare Baffle -

## Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling

## Optical System

Beam Direction Adjustable

Tilt Yes

Swivel Yes

## Electrical System

Driven with Constant Voltage Driver

Input Voltage/Hz 48V

Control Gear Included



Mounting Remote

LED Power Watts 12.2W


System Power Watts -

Operating Voltage Vin 48V

Power Factor p.f. -

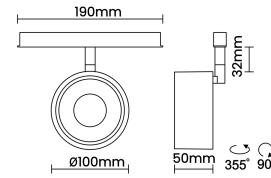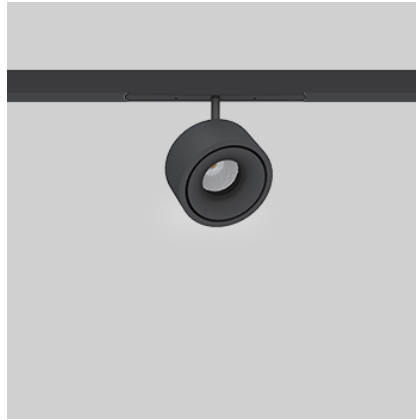

## Light Distribution

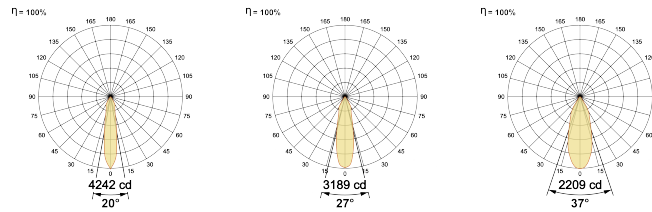

## LED Technology

Binning 3 Step MacAdam

LED Life Time @ L70/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type COB

LED Fitted Cree COB LED 33V-36Vdc/350mA

## Controls

Standard Switchable On/Off

Optional DDIM,BTMM,CASAMBI,Non Dimmable

## Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	Look Around 48V	12.6W	WW27K	CRI80	20°(SS)	SWH	On/Off

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT	CRI	ANGLE	FINISH	CONTROL
Look Around 48V	12.6W	1232	101	2700K	WW27K	CRI80	20°(SS)	White SWH Non Dimmable On/Off
		1269	104	3000K	WW30K	CRI90	27°(MD)	Black SBL Dali Dimmable DDIM
		1330	109	4000K	NW40K		37°(WD)	Bluetooth Dimmable BTMM
		1354	111	5700K	CW57K			Casambi CBTM
				2700K-5700K	TW			
				Warm to Dim	W2D			
Look Around 48V	12.6W			WW27K	CRI80	20°(SS)	SWH	On/Off