

# Linea Magic 48V 60 | 12.6W

## Product Reference

Environment Indoor

Installation Track Mounted

## Construction & Materials

Housing Extruded Aluminium

Primary Lens -

Primary Reflector -

Secondary Reflector -

Body Finish Black

Diffuser Premium high-transmission opal

Antiglare Baffle -

## Thermal Management

Heat Sink Material Aluminium

Cooling Technique Passive Cooling

## Optical System

Beam Direction Fixed

Tilt No

Swivel No

## Electrical System

Driven with Constant Voltage Driver

Input Voltage/Hz 48V

Control Gear Included



Mounting Remote

LED Power Watts 11.8W


System Power Watts -

Operating Voltage Vin 48V

Power Factor p.f. -

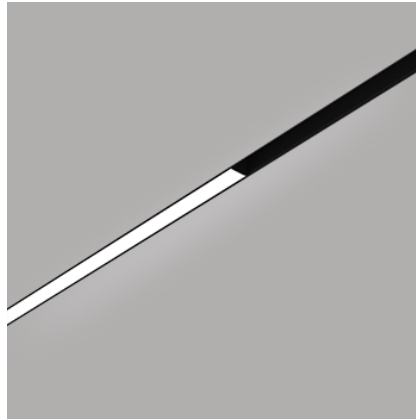

## Light Distribution



## LED Technology

Binning 3 Step MacAdam

LED Life Time @ L70/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type SMD mid power

LED Fitted Samsung Mid power LED array 33V-36Vdc/350mA

## Controls

Standard Switchable On/Off

Optional DDIM,BTTM,CASAMBI,Non Dimmable

## Ordering Details

| Code Example: | Name                      | Watt         | CCT          | CRI          | Angle       | Finish     | Control       |
|---------------|---------------------------|--------------|--------------|--------------|-------------|------------|---------------|
|               | <b>Linea Magic 48V 60</b> | <b>12.6W</b> | <b>WW27K</b> | <b>CRI80</b> | <b>112°</b> | <b>SBL</b> | <b>On/Off</b> |

Select one from each column with highlighted values to create the ordering code

| NAME                      | WATT         | LUMEN | EFFICACY | CCT                   |              | CRI          | ANGLE       | FINISH     |            | CONTROL                        |  |
|---------------------------|--------------|-------|----------|-----------------------|--------------|--------------|-------------|------------|------------|--------------------------------|--|
| <b>Linea Magic 48V 60</b> | <b>12.6W</b> | 861   | 73       | 2700K                 | <b>WW27K</b> | <b>CRI80</b> | 112°        | Black      | <b>SBL</b> | Non Dimmable <b>On/Off</b>     |  |
|                           |              | 885   | 75       | 3000K                 | <b>WW30K</b> | CRI90        |             |            |            | Dali Dimmable <b>DDIM</b>      |  |
|                           |              | 932   | 79       | 4000K                 | <b>NW40K</b> |              |             |            |            | Bluetooth Dimmable <b>BTTM</b> |  |
|                           |              | 956   | 81       | 5700K                 | <b>CW57K</b> |              |             |            |            | Casambi <b>CBTM</b>            |  |
|                           |              |       |          | 2700K-5700K <b>TW</b> |              |              |             |            |            |                                |  |
| <b>Linea Magic 48V 60</b> | <b>12.6W</b> |       |          | <b>WW27K</b>          |              | <b>CRI80</b> | <b>112°</b> | <b>SBL</b> |            | <b>On/Off</b>                  |  |

Abby reserves the right to discontinue any product from its collection at any time whatsoever and without prior notice

[frontdesk@abbylighting.com](mailto:frontdesk@abbylighting.com), +91 9833645212

[www.abbylighting.com](http://www.abbylighting.com)