

# Linea Magic 48V 90 | 18W

## Product Reference

Environment Indoor

Installation Track Mounted

## Construction & Materials

Housing Extruded Aluminium

Primary Lens -

Primary Reflector -

Secondary Reflector -

Body Finish Black

Diffuser Premium high-transmission opal

Antiglare Baffle -

## Thermal Management

Heat Sink Material Aluminium

Cooling Technique Passive Cooling

## Optical System

Beam Direction Fixed

Tilt No

Swivel No

## Electrical System

Driven with Constant Voltage Driver

Input Voltage/Hz 48V

Control Gear Included



Mounting Remote

LED Power Watts 17.7W


System Power Watts -

Operating Voltage Vin 48V

Power Factor p.f. -

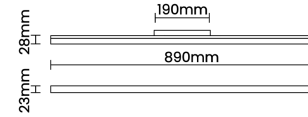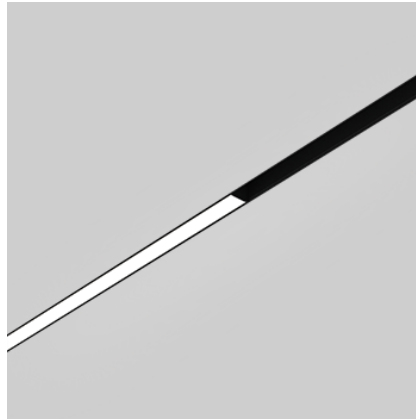

## Light Distribution



## LED Technology

Binning 3 Step MacAdam

LED Life Time @ L70/B10 >50000 hours

Colour Rendering (CRI) CRI90

Led Type SMD mid power

LED Fitted Samsung Mid power LED array 33V-36Vdc/500mA

## Controls

Standard Switchable On/Off

Optional DDIM,BTTM,CASAMBI,Non Dimmable

## Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	<b>Linea Magic 48V 90</b>	<b>18W</b>	<b>WW27K</b>	<b>CRI90</b>	<b>112°</b>	<b>SBL</b>	<b>On/Off</b>

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT	CRI	ANGLE	FINISH	CONTROL		
<b>Linea Magic 48V 90</b>	<b>18W</b>	1292	73	2700K	<b>WW27K</b>	<b>CRI90</b>	112°	Black <b>SBL</b>	Non Dimmable	<b>On/Off</b>
		1328	75	3000K	<b>WW30K</b>				Dali Dimmable	<b>DDIM</b>
		1398	79	4000K	<b>NW40K</b>				Bluetooth Dimmable	<b>BTTM</b>
		1434	81	5700K	<b>CW57K</b>				Casambi	<b>CBTM</b>
				2700K-5700K	<b>TW</b>					
<b>Linea Magic 48V 90</b>	<b>18W</b>			<b>WW27K</b>	<b>CRI90</b>	<b>112°</b>	<b>SBL</b>	<b>On/Off</b>		