

Spotboy 48V 75 | 25.2W

Product Reference

Environment Indoor

Installation Track Mounted

Construction & Materials

Housing Die Cast Aluminium, Milled Aluminium

Primary Lens PMMA

Primary Reflector -

Secondary Reflector -

Body Finish White, Black

Diffuser -

Antiglare Baffle -

Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling

Optical System

Beam Direction Adjustable

Tilt Yes

Swivel Yes

Electrical System

Driven with Constant Voltage Driver

Input Voltage/Hz 48V

Control Gear Included

Mounting Remote

LED Power Watts 24.2W

System Power Watts -

Operating Voltage Vin 48V





Power Factor p.f. -

Ordering Details

| Code Example: | Name | Watt | CCT | CRI | Angle | Finish | Control |
|---------------|-----------------------|--------------|--------------|--------------|----------------|------------|---------------|
| | Spotboy 48V 75 | 25.2W | WW27K | CRI80 | 22°(SS) | SWH | On/Off |

Select one from each column with highlighted values to create the ordering code

| NAME | WATT | LUMEN | EFFICACY | CCT | CRI | ANGLE | FINISH | CONTROL | |
|-----------------------|--------------|-------|-------------|--------------|--------------|----------------|------------|------------------|--------------------------------|
| Spotboy 48V 75 | 25.2W | 2475 | 102 | 2700K | WW27K | CRI80 | 22°(SS) | White SWH | Non Dimmable On/Off |
| | | 2557 | 106 | 3000K | WW30K | CRI90 | 37°(MD) | Black SBL | Dali Dimmable DDIM |
| | | 2693 | 111 | 4000K | NW40K | | 54°(WD) | | Bluetooth Dimmable BTTM |
| | | 2747 | 114 | 5700K | CW57K | | | | Casambi CBTM |
| | | | | 2700K-5700K | TW | | | | |
| | | | Warm to Dim | W2D | | | | | |
| Spotboy 48V 75 | 25.2W | | | WW27K | CRI80 | 22°(SS) | SWH | On/Off | |

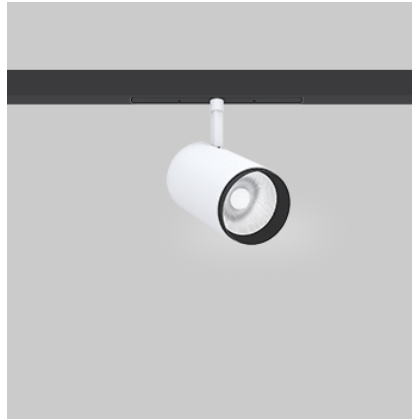

LED Technology

Binning 3 Step MacAdam

LED Life Time @ L70/B10 >50000 hours

Colour Rendering (CRI) CRI80, CRI90

Led Type COB

LED Fitted Cree COB LED 33V-36Vdc/700mA

Controls

Standard Switchable On/Off

Optional DDIM, BTTM, CASAMBI, Non Dimmable