

# Peeping Tom SF | 8W

## Product Reference

Environment Indoor

Installation Ceiling Surface

## Construction & Materials

Housing Die Cast Aluminium, Milled Aluminium

Primary Lens PMMA

Primary Reflector PC metallised

Secondary Reflector -

Body Finish White, Black, Custom

Diffuser -

Antiglare Baffle -

## Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling

## Optical System

Beam Direction Adjustable

Tilt Yes

Swivel Yes

## Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included

Mounting Remote

LED Power Watts 7.4W

System Power Watts 8.5W

Operating Voltage  $V_{in}$  220-240 Vac



Power Factor p.f. > 0.95

## Ordering Details


| Code Example: | Name                  | Watt      | CCT          | CRI          | Angle          | Finish     | Control       |
|---------------|-----------------------|-----------|--------------|--------------|----------------|------------|---------------|
|               | <b>Peeping Tom SF</b> | <b>8w</b> | <b>WW27K</b> | <b>CRI80</b> | <b>24°(MD)</b> | <b>SWH</b> | <b>On/Off</b> |

Select one from each column with highlighted values to create the ordering code

| NAME                  | WATT      | LUMEN | EFFICACY | CCT          | CRI          | ANGLE          | FINISH     | CONTROL           |                            |
|-----------------------|-----------|-------|----------|--------------|--------------|----------------|------------|-------------------|----------------------------|
| <b>Peeping Tom SF</b> | <b>8w</b> | 621   | 73       | 2700K        | <b>WW27K</b> | <b>CRI80</b>   | 24°(MD)    | White <b>SWH</b>  | Non Dimmable <b>On/Off</b> |
|                       |           | 638   | 75       | 3000K        | <b>WW30K</b> | CRI90          | 36°(WD)    | Black <b>SBL</b>  |                            |
|                       |           | 672   | 79       | 4000K        | <b>NW40K</b> |                | 52°(VWD)   | Custom <b>CSM</b> |                            |
|                       |           | 689   | 81       | 5700K        | <b>CW57K</b> |                |            |                   |                            |
| <b>Peeping Tom SF</b> | <b>8w</b> |       |          | <b>WW27K</b> | <b>CRI80</b> | <b>24°(MD)</b> | <b>SWH</b> | <b>On/Off</b>     |                            |

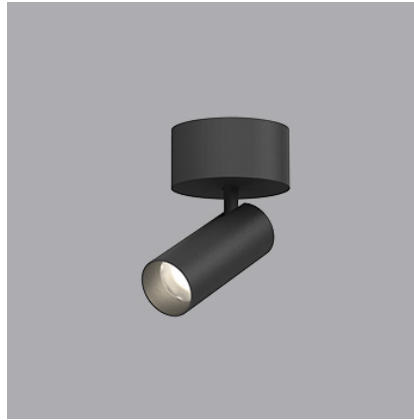

## Light Distribution

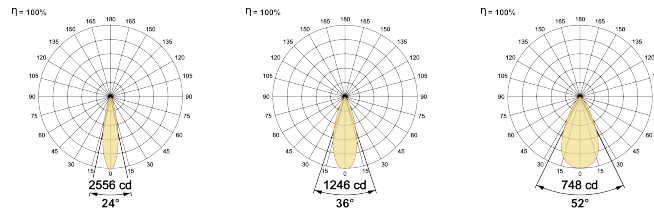

## LED Technology

Binning 3 Step MacAdam

LED Life Time @ L70/B10 >50000 hours

Colour Rendering (CRI) CRI80, CRI90

Led Type COB

LED Fitted CREE COB LED 9Vdc/700mA

## Controls

Standard Switchable On/Off

Optional Non Dimmable