

Spot On Framer 48V | 7.2W

Product Reference

Environment Indoor

Installation Track Mounted

Construction & Materials

Housing Aluminium

Primary Lens PMMA

Primary Reflector -

Secondary Reflector -

Body Finish Black

Diffuser -

Antiglare Baffle -

Thermal Management

Heat Sink Material Aluminium

Cooling Technique Passive Cooling

Optical System

Beam Direction Adjustable

Tilt Yes

Swivel Yes

Electrical System

Driven with Constant Voltage Driver

Input Voltage/Hz 48V

Control Gear Included



Mounting Remote

LED Power Watts 7.2W


System Power Watts -

Operating Voltage Vin 48V

Power Factor p.f. -

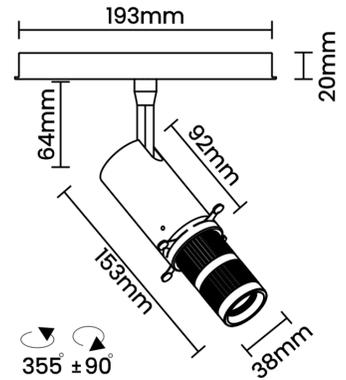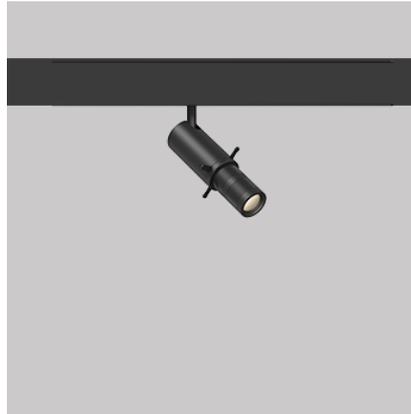

Light Distribution



LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type COB

LED Fitted Cree COB LED 36Vdc/200mA

Controls

Standard Switchable On/Off

Optional DDIM, Non Dimmable

Ordering Details

| Code Example: | Name | Watt | CCT | CRI | Angle | Finish | Control |
|---------------|---------------------------|-------------|--------------|--------------|----------------|------------|---------------|
| | Spot On Framer 48V | 7.2W | WW27K | CRI80 | 22°-31° | SBL | On/Off |

Select one from each column with highlighted values to create the ordering code

| NAME | WATT | LUMEN | EFFICACY | CCT | CRI | ANGLE | FINISH | CONTROL |
|---------------------------|-------------|-------|----------|--------------------|--------------|----------------|------------------|----------------------------|
| Spot On Framer 48V | 7.2W | 468 | 65 | 2700K WW27K | CRI80 | 22°-31° | Black SBL | Non Dimmable On/Off |
| | | 485 | 67 | 3000K WW30K | CRI90 | | | Dali Dimmable DDIM |
| | | 510 | 71 | 4000K NW40K | | | | |
| | | 519 | 72 | 5700K CW57K | | | | |
| Spot On Framer 48V | 7.2W | | | WW27K | CRI80 | 22°-31° | SBL | On/Off |

