

Spot On Framer ITA 55 | 14W

Product Reference

Environment Indoor
Installation Track Mounted

Construction & Materials

Housing Aluminium
Primary Lens PMMA
Primary Reflector -
Secondary Reflector -
Body Finish Black
Diffuser -
Antiglare Baffle -

Thermal Management


Heat Sink Material Aluminium
Cooling Technique Passive Cooling

Optical System


Beam Direction Adjustable
Tilt Yes
Swivel Yes

Electrical System

Driven with Constant Current Driver
Input Voltage/Hz 220V- 240V/50-60Hz
Control Gear Included
Mounting Remote
LED Power Watts 12.2W
System Power Watts 14.0W
Operating Voltage Vin 220-240 Vac
Power Factor p.f. > 0.95



Light Distribution

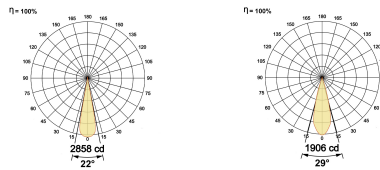

LED Technology

Binning 3 Step MacAdam
LED Life Time @ L70/B10 >50000 hours
Colour Rendering (CRI) CRI80,CRI90
Led Type COB
LED Fitted Cree COB LED 36Vdc/350mA

Controls

Standard Switchable On/Off
Optional Non Dimmable

Ordering Details

| Code Example: | Name | Watt | CCT | CRI | Angle | Finish | Control |
|---------------|------------------------------|------------|--------------|--------------|----------------|------------|---------------|
| | Spot On Framer ITA 55 | 14W | WW27K | CRI80 | 22°-29° | SBL | On/Off |

Select one from each column with highlighted values to create the ordering code

| NAME | WATT | LUMEN | EFFICACY | CCT | CRI | ANGLE | FINISH | CONTROL |
|------------------------------|------------|-------|----------|--------------------|--------------|----------------|------------------|----------------------------|
| Spot On Framer ITA 55 | 14W | 392 | 28 | 2700K WW27K | CRI80 | 22°-29° | Black SBL | Non Dimmable On/Off |
| | | 406 | 29 | 3000K WW30K | CRI90 | | | |
| | | 434 | 31 | 4000K NW40K | | | | |
| | | 448 | 32 | 5700K CW57K | | | | |
| Spot On Framer ITA 55 | 14W | | | WW27K | CRI80 | 22°-29° | SBL | On/Off |