

Spot On Framer ITA 85

Narrow Beam | 24W

Product Reference

Environment Indoor
 Installation Track Mounted

Construction & Materials

Housing Aluminium
 Primary Lens PMMA
 Primary Reflector -
 Secondary Reflector -
 Body Finish Black
 Diffuser -
 Antiglare Baffle -

Thermal Management


Heat Sink Material Aluminium
 Cooling Technique Passive Cooling

Optical System


Beam Direction Adjustable
 Tilt Yes
 Swivel Yes

Electrical System

Driven with Constant Current Driver
 Input Voltage/Hz 220V- 240V/50-60Hz
 Control Gear Included
 Mounting Remote
 LED Power Watts 19.7W
 System Power Watts 22.7W
 Operating Voltage Vin 220-240 Vac
 Power Factor p.f. > 0.95



Light Distribution

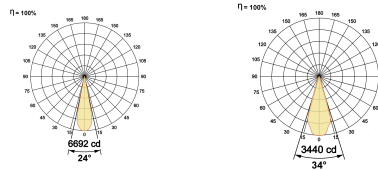

LED Technology

Binning 3 Step MacAdam
 LED Life Time @ L70/B10 >50000 hours
 Colour Rendering (CRI) CRI80,CRI90
 Led Type COB
 LED Fitted Cree COB LED 36Vdc/600mA

Controls

Standard Switchable On/Off
 Optional Non Dimmable

Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	Spot On Framer ITA 85 Narrow Beam	24W	WW27K	CRI80	24°-34°	SBL	On/Off

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT		CRI	ANGLE	FINISH	CONTROL
Spot On Framer ITA 85 Narrow Beam	24W	976	43	2700K	WW27K	CRI80	24°-34°	Black SBL	Non Dimmable On/Off
		999	44	3000K	WW30K	CRI90			
		1044	46	4000K	NW40K				
		1067	47	5700K	CW57K				
Spot On Framer ITA 85 Narrow Beam	24W			WW27K	CRI80	24°-34°	SBL	On/Off	