
220V 240V 50/60Hz | IP20 | L80B10 >50,000h | MacAdam Step 3 | Swivel | Tilt | CRI 90

Optional CRI 80

Spot On Framer ITA 85 Narrow Beam | 28W



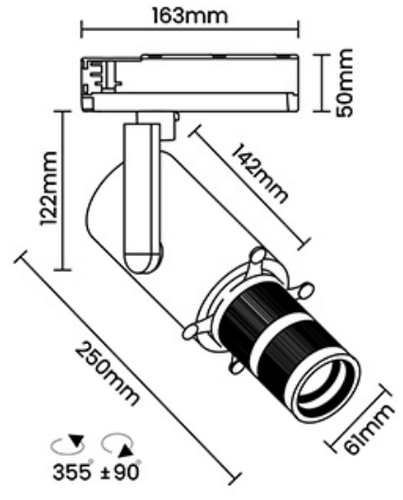

Product Reference

Environment Indoor

Installation Track Mounted

Construction & Materials

Housing Aluminium

Primary Lens PMMA

Primary Reflector -

Secondary Reflector -

Body Finish Black

Diffuser -

Antiglare Baffle -

Thermal Management

Heat Sink Material Aluminium

Cooling Technique Passive Cooling

Optical System

Beam Direction Adjustable

Tilt Yes

Swivel Yes

Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included

Mounting Remote


LED Power Watts 24.0W


System Power Watts 27.6W

Operating Voltage Vin 220-240 Vac

Power Factor p.f. > 0.95

Light Distribution





LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type COB

LED Fitted Cree COB LED 36Vdc/700mA

Controls

Standard Switchable On/Off

Optional Non Dimmable

Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	Spot On Framer ITA 85 Narrow Beam	**28W**	**WW27K**	**CRI80**	**24°-34°**	**SBL**	**On/Off**

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT		CRI	ANGLE	FINISH		CONTROL	
Spot On Framer ITA 85 Narrow Beam	**28W**	1132	41	2700K	**WW27K**	**CRI80**	24°-34°	Black	**SBL**	Non Dimmable	**On/Off**
		1159	42	3000K	**WW30K**	CRI90					
		1214	44	4000K	**NW40K**						
		1242	45	5700K	**CW57K**						
Spot On Framer ITA 85 Narrow Beam	**28W**			**WW27K**		**CRI80**	**24°-34°**	**SBL**		**On/Off**	

Abby Lighting & Switchgear Limited 802 A, Fortune Terraces, New Link Road, Opp City Mall, Andheri West, Mumbai - 400053, India.

frontdesk@abbylighting.com, +91 7304623220

Abby reserves the right to discontinue any product from its collection at any time whatsover and without prior notice