
ABBY LIGHTING

220V 240V 50/60Hz | IP20 | L80B10 >50,000h | MacAdam Step 3 | Swivel | Tilt | CRI 90

Optional: CRI 80 | Dimmable

Spot on Framer SR 55 | 14W



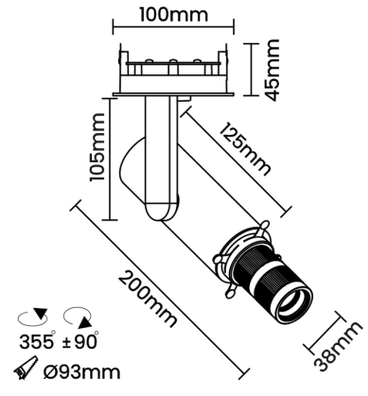

Product Reference

Environment Indoor

Installation Semi Recess

Construction & Materials

Housing Aluminium

Primary Lens PMMA

Primary Reflector -

Secondary Reflector -

Body Finish Black

Diffuser -

Antiglare Baffle -

Thermal Management

Heat Sink Material Aluminium

Cooling Technique Passive Cooling

Optical System

Beam Direction Adjustable

Tilt Yes

Swivel Yes

Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included

Mounting Remote


LED Power Watts 12.2W


System Power Watts 14.0W

Operating Voltage Vin 220-240 Vac

Power Factor p.f. > 0.95

Light Distribution





LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type COB

LED Fitted Cree COB LED 36Vdc/350mA

Controls

Standard Switchable On/Off

Optional PDIM,DDIM,Non Dimmable

Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	Spot on Framer SR 55	**14W**	**WW27K**	**CRI80**	**22°-29°**	**SBL**	**On/Off**

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT		CRI	ANGLE	FINISH		CONTROL	
Spot on Framer SR 55	**14W**	392	28	2700K	**WW27K**	**CRI80**	22°-29°	Black	**SBL**	Non Dimmable	**On/Off**
		406	29	3000K	**WW30K**	CRI90				Phase Dimmable	**PDIM**
		434	31	4000K	**NW40K**					Dali Dimmable	**DDIM**
		448	32	5700K	**CW57K**						
Spot on Framer SR 55	**14W**			**WW27K**		**CRI80**	**22°-29°**	**SBL**		**On/Off**	

Abby Lighting & Switchgear Limited 802 A, Fortune Terraces, New Link Road, Opp City Mall, Andheri West, Mumbai - 400053, India.
frontdesk@abbylighting.com, +91 7304623220
www.abbylighting.com

Abby reserves the right to discontinue any product from its collection at any time whatsover and without prior notice