

Spot on Framer SR 85

Narrow Beam | 24W

Product Reference

Environment Indoor

Installation Semi Recess

Construction & Materials

Housing Aluminium

Primary Lens PMMA

Primary Reflector -

Secondary Reflector -

Body Finish Black

Diffuser -

Antiglare Baffle -

Thermal Management

Heat Sink Material Aluminium

Cooling Technique Passive Cooling

Optical System

Beam Direction Adjustable

Tilt Yes

Swivel Yes

Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included

Mounting Remote

LED Power Watts 19.7W

System Power Watts 22.7W

Operating Voltage Vin 220-240 Vac


Power Factor p.f. > 0.95

Ordering Details


Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	Spot on Framer SR 85 Narrow Beam	24W	WW27K	CRI80	24°-34°	SBL	On/Off

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT	CRI	ANGLE	FINISH	CONTROL
Spot on Framer SR 85 Narrow Beam	24W	976	43	2700K WW27K	CRI80	24°-34°	Black SBL	Non Dimmable On/Off
		999	44	3000K WW30K	CRI90			Phase Dimmable PDIM
		1044	46	4000K NW40K				Dali Dimmable DDIM
		1067	47	5700K CW57K				
Spot on Framer SR 85 Narrow Beam	24W			WW27K	CRI80	24°-34°	SBL	On/Off



Light Distribution

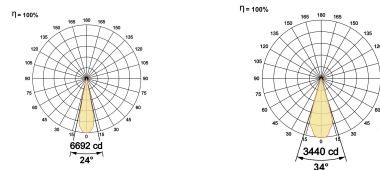

LED Technology

Binning 3 Step MacAdam

LED Life Time @ L70/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type COB

LED Fitted Cree COB LED 36Vdc/600mA

Controls

Standard Switchable On/Off

Optional PDIM,DDIM,Non Dimmable