

Twinline P OPD 120 | 40W

Product Reference

Environment Indoor

Installation Ceiling Suspended

Construction & Materials

Housing Extruded Aluminium

Primary Lens -

Primary Reflector -

Secondary Reflector -

Body Finish White,Black,Custom

Diffuser Premium high-transmission opal

Antiglare Baffle -

Thermal Management

Heat Sink Material Aluminium

Cooling Technique Passive Cooling

Optical System

Beam Direction General Diffuse

Tilt No

Swivel No

Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included



Mounting Integral

LED Power Watts 34.3W


System Power Watts 39.4W

Operating Voltage Vin 220-240 Vac

Power Factor p.f. > 0.95

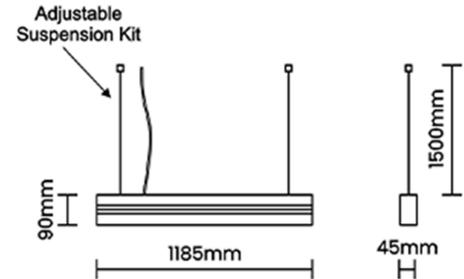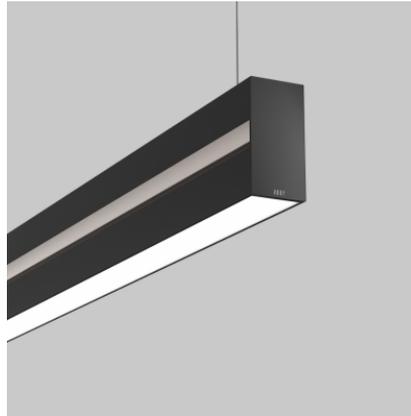

Light Distribution



LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type SMD mid power

LED Fitted Osram/Samsung Mid power LED array 32V-36Vdc/1000mA

Controls

Standard Switchable On/Off

Optional DDIM,CASAMBI,Non Dimmable

Ordering Details

| Code Example: | Name | Watt | CCT | CRI | Angle | Finish | Control |
|---------------|---------------------------|------------|--------------|--------------|-------------|------------|---------------|
| | Twinline P OPD 120 | 40W | WW27K | CRI80 | 110° | SWH | On/Off |

Select one from each column with highlighted values to create the ordering code

| NAME | WATT | LUMEN | EFFICACY | CCT | CRI | ANGLE | FINISH | CONTROL |
|---------------------------|------------|-------|----------|--------------|--------------|--------------|------------|---|
| Twinline P OPD 120 | 40W | 2994 | 76 | 2700K | WW27K | CRI80 | 110° | White SWH Non Dimmable On/Off |
| | | 3073 | 78 | 3000K | WW30K | | CRI90 | Black SBL Dali Dimmable DDIM |
| | | 3231 | 82 | 4000K | NW40K | | Custom | CSM Casambi CBTM |
| | | 3310 | 84 | 5700K | CW57K | | | |
| | | | | 2700K-5700K | TW | | | |
| Twinline P OPD 120 | 40W | | | WW27K | CRI80 | 110° | SWH | On/Off |

