

Birds on a Branch 2way | 2X10W

Product Reference

Environment Indoor

Installation Ceiling Surface

Construction & Materials

Housing Die Cast Aluminium,Milled Aluminium

Primary Lens PMMA

Primary Reflector PC metallised

Secondary Reflector -

Body Finish White,Black,Custom

Diffuser -

Antiglare Baffle -

Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling

Optical System

Beam Direction Adjustable

Tilt Yes

Swivel Yes

Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included


Mounting Integral

LED Power Watts 2x8.8W2




System Power Watts 2x10.1W

Operating Voltage Vin 220-240Vac

Power Factor p.f. >0.95

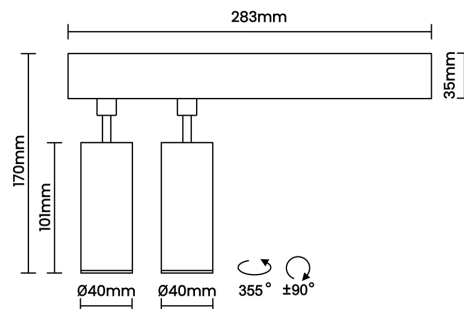

Light Distribution



LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type COB

LED Fitted CREE COB LED 36Vdc/500mA

Controls

Standard Switchable On/Off

Optional PDIM,DDIM,BTTM,CASAMBI,Non Dimmable

Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	Birds on a Branch 2way	2x10W	WW27K	CRI80	28°	SWH	On/Off

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT		CRI	ANGLE		FINISH		CONTROL	
Birds on a Branch 2way	2x10W	2x808	80	2700K	WW27K	CRI80	28°	28°	White	SWH	Non Dimmable	On/Off
		2x828	82	3000K	WW30K	CRI90	36°	36°	Black	SBL	Phase Dimmable	PDIM
		2x869	86	4000K	NW40K		57°	57°	Custom	CSM	Dali Dimmable	DDIM
		2x889	88	5700K	CW57K						Bluetooth Dimmable	BTTM
											Casambi	CBTM
Birds on a Branch 2way	2x10W			WW27K		CRI80	28°		SWH		On/Off	

