

Sigma 60 2-way | 2X8W

Product Reference

Environment Indoor

Installation Ceiling Recess

Construction & Materials

Housing Aluminium

Primary Lens -

Primary Reflector PC metallised

Secondary Reflector Anodised

Body Finish White,Black

Diffuser -

Antiglare Baffle -

Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling

Optical System

Beam Direction Fixed

Tilt No

Swivel No

Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included


Mounting Integral

LED Power Watts 13W

System Power Watts 15W

Operating Voltage Vin 220-240Vac

Power Factor p.f. >0.95

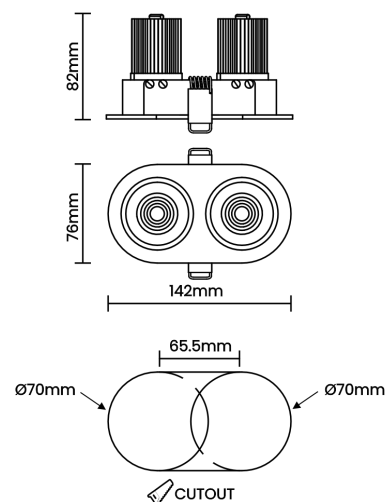

Light Distribution

LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type -

LED Fitted Cree COB LED 33V-36Vdc/180mA

Controls

Standard Switchable On/Off

Optional DDIM

Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	Sigma 60 2-way	2x8W	WW27K	CRI80	29°(MD)	SWH	On/Off

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT	CRI	ANGLE		FINISH		CONTROL		
Sigma 60 2-way	2x8W	2x615	82	2700K	WW27K	CRI80	29°(MD)	29°(MD)	White	SWH	Non Dimmable	On/Off
		2x630	84	3000K	WW30K	CRI90	42°(WD)	42°(WD)	Black	SBL	Phase Dimmable	PDIM
		2x660	88	4000K	NW40K		62°(VWD)	62°(VWD)			Dali Dimmable	DDIM
		2x675	90	5700K	CW57K							
Sigma 60 2-way	2x8W			WW27K	CRI80	29°(MD)		SWH		On/Off		