

## T Zee MPD 60 | 10W

### Product Reference

Environment Indoor

Installation Ceiling Recess

### Construction & Materials

Housing Extruded and Sheet Aluminium

Primary Lens -

Primary Reflector White Optics

Secondary Reflector -

Body Finish White,Black,Custom

Diffuser Microprismatic

Antiglare Baffle -

### Thermal Management

Heat Sink Material Aluminium

Cooling Technique Passive Cooling

### Optical System

Beam Direction Fixed

Tilt -

Swivel -

### Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included



Mounting Integral

LED Power Watts 8.4W

System Power Watts 9.7W

Operating Voltage Vin 220-240Vac

Power Factor p.f. >0.95

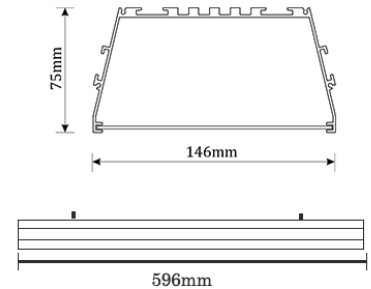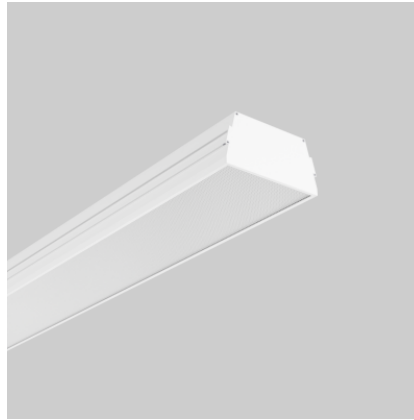

### Light Distribution

### LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type SMD mid power

LED Fitted Osram/Samsung Mid power LED array 32V-36Vdc/250mA

### Controls

Standard Switchable On/Off

Optional PDIM,DDIM,CASAMBI

### Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	<b>T Zee MPD 60</b>	<b>10W</b>	<b>WW27K</b>	<b>CRI80</b>	<b>79°</b>	<b>SWH</b>	

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT	CRI	ANGLE	FINISH	CONTROL	
<b>T Zee MPD 60</b>	<b>10W</b>	980	101	2700K	<b>WW27K</b>	79°	White	<b>SWH</b>	
		1009	104	3000K	<b>WW30K</b>		CRI90	Black	<b>SBL</b>
		1057	109	4000K	<b>NW40K</b>			Custom	<b>CSM</b>
		1077	111	5700K	<b>CW57K</b>				
				2700K-5700K	<b>TW</b>				
<b>T Zee MPD 60</b>	<b>10W</b>			<b>WW27K</b>	<b>CRI80</b>	<b>79°</b>	<b>SWH</b>		