

## T Zee MPD 240 | 40W

### Product Reference

Environment Indoor

Installation Ceiling Recess

### Construction & Materials

Housing Extruded and Sheet Aluminium

Primary Lens -

Primary Reflector White Optics

Secondary Reflector -

Body Finish White,Black,Custom

Diffuser Microprismatic

Antiglare Baffle -

### Thermal Management

Heat Sink Material Aluminium

Cooling Technique Passive Cooling

### Optical System

Beam Direction General Diffuse

Tilt No

Swivel No

### Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included


Mounting Integral

LED Power Watts 33.8W

System Power Watts 38.8W

Operating Voltage Vin 220-240Vac

Power Factor p.f. >0.95

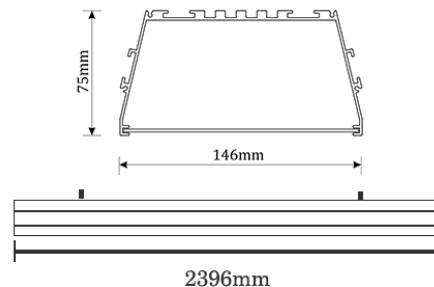

### Light Distribution

#### LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type SMD mid power

LED Fitted Osram/Samsung Mid power LED array 32V-36Vdc/1000mA

#### Controls

Standard Switchable On/Off

Optional PDIM,DDIM,CASAMBI,Non Dimmable

### Ordering Details

| Code Example: | Name                 | Watt       | CCT          | CRI          | Angle                      | Finish     | Control       |
|---------------|----------------------|------------|--------------|--------------|----------------------------|------------|---------------|
|               | <b>T Zee MPD 240</b> | <b>40W</b> | <b>WW27K</b> | <b>CRI80</b> | <b>79° general diffuse</b> | <b>SWH</b> | <b>On/Off</b> |

Select one from each column with highlighted values to create the ordering code

| NAME                 | WATT       | LUMEN | EFFICACY | CCT          |              | CRI          | ANGLE                      | FINISH     |            | CONTROL        |               |
|----------------------|------------|-------|----------|--------------|--------------|--------------|----------------------------|------------|------------|----------------|---------------|
| <b>T Zee MPD 240</b> | <b>40W</b> | 3919  | 101      | 2700K        | <b>WW27K</b> | <b>CRI80</b> | 79° general diffuse        | White      | <b>SWH</b> | Non Dimmable   | <b>On/Off</b> |
|                      |            | 4035  | 104      | 3000K        | <b>WW30K</b> | CRI90        |                            | Black      | <b>SBL</b> | Phase Dimmable | <b>PDIM</b>   |
|                      |            | 4229  | 109      | 4000K        | <b>NW40K</b> |              |                            | Custom     | <b>CSM</b> | Dali Dimmable  | <b>DDIM</b>   |
|                      |            | 4307  | 111      | 5700K        | <b>CW57K</b> |              |                            |            |            | Casambi        | <b>CBTM</b>   |
|                      |            |       |          | 2700K-5700K  | <b>TW</b>    |              |                            |            |            |                |               |
| <b>T Zee MPD 240</b> | <b>40W</b> |       |          | <b>WW27K</b> |              | <b>CRI80</b> | <b>79° general diffuse</b> | <b>SWH</b> |            | <b>On/Off</b>  |               |