

T Zee MPD 240 | 80W

Product Reference

Environment Indoor

Installation Ceiling Recess

Construction & Materials

Housing Extruded and Sheet Aluminium

Primary Lens -



Primary Reflector White Optics

Secondary Reflector -

Body Finish White,Black,Custom

Diffuser Microprismatic

Antiglare Baffle -

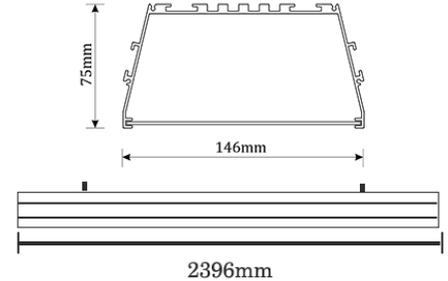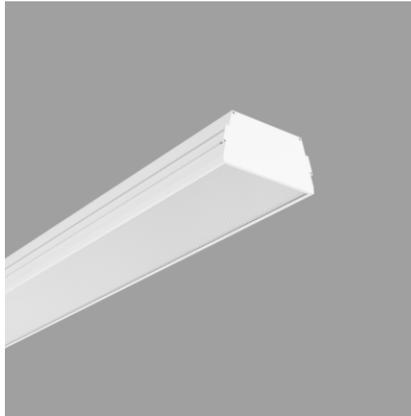

Thermal Management

Heat Sink Material Aluminium

Cooling Technique Passive Cooling

Optical System

Beam Direction General Diffuse

Tilt No

Swivel No

Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included

Mounting Integral

LED Power Watts 68.9W

System Power Watts 79.2W

Operating Voltage Vin 220-240Vac

Power Factor p.f. >0.95

Light Distribution

LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type SMD mid power

LED Fitted Osram/Samsung Mid power LED array 32V-36Vdc/2000mA

Controls

Standard Switchable On/Off

Optional PDIM,DDIM,CASAMBI,Non Dimmable

Ordering Details

| Code Example: | Name | Watt | CCT | CRI | Angle | Finish | Control |
|---------------|----------------------|------------|--------------|--------------|----------------------------|------------|---------------|
| | T Zee MPD 240 | 80W | WW27K | CRI80 | 79° general diffuse | SWH | On/Off |

Select one from each column with highlighted values to create the ordering code

| NAME | WATT | LUMEN | EFFICACY | CCT | CRI | ANGLE | FINISH | CONTROL | | |
|----------------------|------------|-------|----------|--------------|--------------|----------------------------|------------|---------------|----------------|---------------|
| T Zee MPD 240 | 80W | 7762 | 98 | 2700K | WW27K | 79° general diffuse | White | SWH | Non Dimmable | On/Off |
| | | 7999 | 101 | 3000K | WW30K | | Black | SBL | Phase Dimmable | PDIM |
| | | 8395 | 106 | 4000K | NW40K | | Custom | CSM | Dali Dimmable | DDIM |
| | | 8554 | 108 | 5700K | CW57K | | | | Casambi | CBTM |
| | | | | 2700K-5700K | TW | | | | | |
| T Zee MPD 240 | 80W | | | WW27K | CRI80 | 79° general diffuse | SWH | On/Off | | |