



ABBY
LIGHTING

220V
240V 50/60Hz



CRI 80

IP20

L80B10
>50,000h

MacAdam
Step 3

Swivel
Tilt

Optional

Bluetooth

Dimmable

CRI 90

Mojo 65 HGB VWD | 24W

Product Reference

Environment Indoor

Installation Track Mounted

Construction & Materials

Housing Aluminium

Primary Lens -

Primary Reflector PC metallised

Secondary Reflector Anodised

Body Finish White,Black

Diffuser -

Antiglare Baffle -

Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling

Optical System

Beam Direction Adjustable

Tilt Yes

Swivel Yes

Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included



Mounting Integral

LED Power Watts 20.7W

System Power Watts 23.8W

Operating Voltage Vin 220-240Vac

Power Factor p.f. >0.95

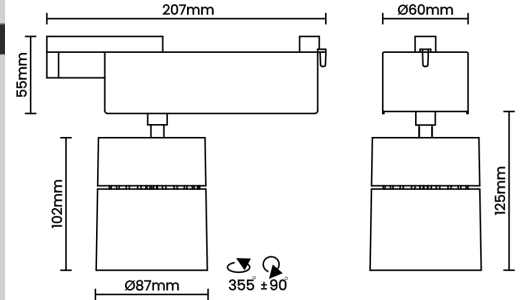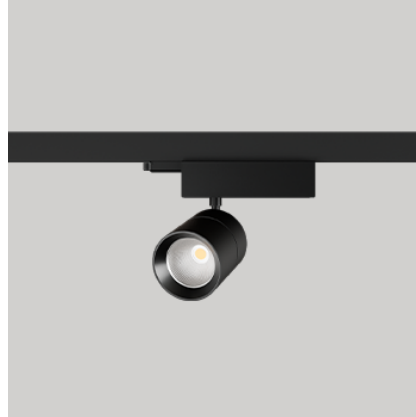

Light Distribution

LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type COB

LED Fitted Cree COB LED 33V-36Vdc/600mA

Controls

Standard Switchable On/Off

Optional DDIM,BTDM,CASAMBI

Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	Mojo 65 HGB VWD	24W	WW27K	CRI80	51°	SWH	On/Off

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT	CRI	ANGLE	FINISH	CONTROL
Mojo 65 HGB VWD	24W	2428	102	2700K	WW27K	CRI80	51°	White SWH
		2499	105	3000K	WW30K	CRI90		Black SBL
		2618	110	4000K	NW40K			Non Dimmable On/off
		2666	112	5700K	CW57K			Dali Dimmable DDIM
Mojo 65 HGB VWD	24W							Bluetooth Dimmable BTM
								Casambi CBM
				WW27K	CRI80	51°	SWH	On/Off