

# Slate Slim D/I | 54W

## Product Reference

Environment Indoor

Installation Ceiling Suspended

## Construction & Materials

Housing Extruded and Die Cast Aluminium

Primary Lens -

Primary Reflector -

Secondary Reflector -

Body Finish White,Black,Custom

Diffuser Microprismatic

Antiglare Baffle -

## Thermal Management

Heat Sink Material Aluminium

Cooling Technique Passive Cooling

## Optical System

Beam Direction Fixed

Tilt No

Swivel No

## Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included


Mounting Remote

LED Power Watts 46.8W


System Power Watts 53.8W

Operating Voltage Vin 220-240 Vac

Power Factor p.f. &gt; 0.95

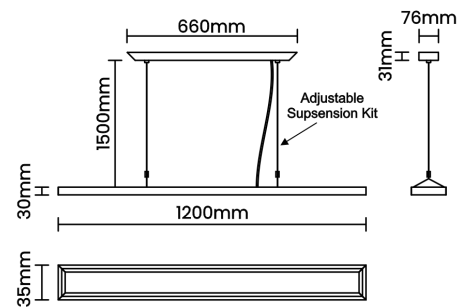

## Light Distribution



## LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 &gt;50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type SMD mid power

LED Fitted Osram/Samsung Mid power LED array 33V-36Vdc/1400mA

## Controls

Standard Switchable On/Off

Optional DDIM,CASAMBI,Non Dimmable

## Ordering Details

| Code Example: | Name                  | Watt       | CCT          | CRI          | Angle      | Finish     | Control       |
|---------------|-----------------------|------------|--------------|--------------|------------|------------|---------------|
|               | <b>Slate Slim D/I</b> | <b>54W</b> | <b>WW27K</b> | <b>CRI80</b> | <b>94°</b> | <b>SWH</b> | <b>On/Off</b> |

Select one from each column with highlighted values to create the ordering code

| NAME                  | WATT       | LUMEN | EFFICACY | CCT          | CRI          | ANGLE        | FINISH     | CONTROL                                     |
|-----------------------|------------|-------|----------|--------------|--------------|--------------|------------|---------------------------------------------|
| <b>Slate Slim D/I</b> | <b>54W</b> | 2959  | 55       | 2700K        | <b>WW27K</b> | <b>CRI80</b> | 94°        | White <b>SWH</b> Non Dimmable <b>On/Off</b> |
|                       |            | 3067  | 57       | 3000K        | <b>WW30K</b> |              |            | Black <b>SBL</b> Dali Dimmable <b>DDIM</b>  |
|                       |            | 3228  | 60       | 4000K        | <b>NW40K</b> |              |            | Custom <b>CSM</b> Casambi <b>CBTM</b>       |
|                       |            | 3336  | 62       | 5700K        | <b>CW57K</b> |              |            |                                             |
|                       |            |       |          | 2700K-5700K  | <b>TW</b>    |              |            |                                             |
| <b>Slate Slim D/I</b> | <b>54W</b> |       |          | <b>WW27K</b> | <b>CRI80</b> | <b>94°</b>   | <b>SWH</b> | <b>On/Off</b>                               |

