

Black Jack F TL | 5W

Product Reference

Environment Indoor

Installation Ceiling Recess

Construction & Materials

Housing Die Cast Aluminium

Primary Lens PMMA

Primary Reflector -

Secondary Reflector -

Body Finish White,Black,Custom

Diffuser -

Antiglare Baffle -

Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling

Optical System

Beam Direction Fixed

Tilt No

Swivel No

Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included



Mounting Remote

LED Power Watts 4.8W


System Power Watts 5.5W

Operating Voltage Vin 220V- 240V/50-60Hz

Power Factor p.f. >0.95

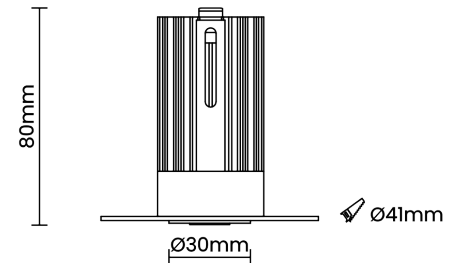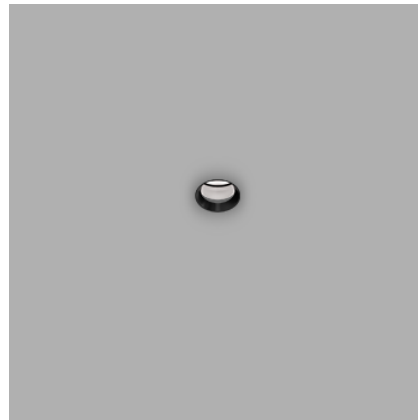

Light Distribution



LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 >50000 hours

Colour Rendering (CRI) CRI90

Led Type COB

LED Fitted CREE COB LED 36Vdc/130mA

Controls

Standard Switchable On/Off

Optional PDIM,DDIM,CASAMBI,Non Dimmable

Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	Black Jack F TL	5W	WW27K	CRI90	30°(MD)	SWH	On/Off

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT	CRI	ANGLE	FINISH	CONTROL
Black Jack F TL	5W	341	62	2700K	WW27K	CRI90	30°(MD)	White SWH Non Dimmable On/Off
		352	64	3000K	WW30K	CRI90	44°(WD)	Black SBL Phase Dimmable PDIM
		369	67	4000K	NW40K	CRI90	Custom CSM	Dali Dimmable DDIM
		380	69	5700K	CW57K	CRI90	Custom CSM	Casambi CBTM
Black Jack F TL	5W			WW27K	CRI90	30°(MD)	SWH	On/Off

