

iNline R 240 | 60W

Product Reference

Environment Indoor
Installation Ceiling Recess

Construction & Materials

Housing Extruded Aluminium
Primary Lens -
Primary Reflector -
Secondary Reflector -
Body Finish White,Black,Custom
Diffuser Premium high-transmission opal
Antiglare Baffle -

Thermal Management

Heat Sink Material Aluminium
Cooling Technique Passive Cooling

Optical System

Beam Direction General Diffuse
Tilt No
Swivel No

Electrical System



Driven with Constant Current Driver
Input Voltage/Hz 220V- 240V/50-60Hz
Control Gear Included
Mounting Integral
LED Power Watts 47.7W
System Power Watts 54.8W
Operating Voltage Vin 220-240 Vac
Power Factor p.f. > 0.95

Ordering Details


Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	iNline R 240	60W	WW27K	CRI80	103°	SWH	On/Off

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT	CRI	ANGLE	FINISH	CONTROL		
iNline R 240	60W	5974	109	WW27K	CRI80	103°	White	Non Dimmable On/Off		
		6138	112				Black		SBL	Dali Dimmable DDIM
		6522	119				Custom		CSM	Casambi CBTM
		6740	123							
iNline R 240	60W			WW27K	CRI80	103°	SWH	On/Off		

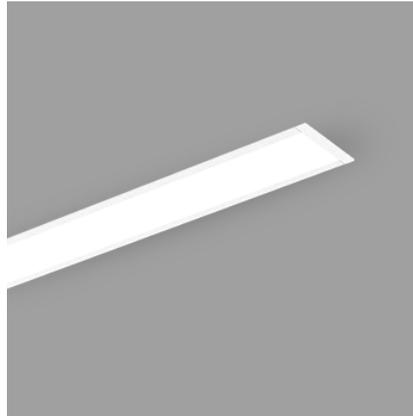

Light Distribution



LED Technology

Binning 3 Step MacAdam
LED Life Time @ L80/B10 >50000 hours
Colour Rendering (CRI) CRI80,CRI90
Led Type SMD mid power
LED Fitted Osram/Samsung Mid power LED array 32V-38Vdc/1400mA

Controls

Standard Switchable On/Off
Optional DDIM,CASAMBI,Non Dimmable