

ZuG MPD P 60 | 10W

Product Reference

Environment Indoor

Installation Ceiling Suspended

Construction & Materials

Housing Extruded Aluminium

Primary Lens -

Primary Reflector Aluminium White Painted

Secondary Reflector -

Body Finish White,Black

Diffuser Microprismatic

Antiglare Baffle Black,White,Custom

Thermal Management

Heat Sink Material Aluminium

Cooling Technique Passive Cooling

Optical System

Beam Direction General Diffuse

Tilt No

Swivel No

Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included



Mounting Integral

LED Power Watts 8.6W


System Power Watts 9.9W

Operating Voltage V_{in} 220-240 Vac

Power Factor p.f. > 0.95

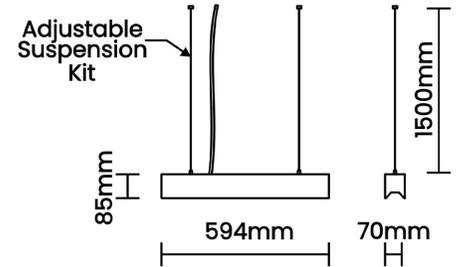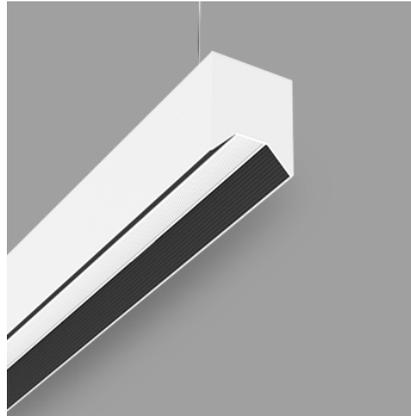

Light Distribution



LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type SMD mid power

LED Fitted Osram/Samsung Mid Power LED array 33V-36Vdc/250mA

Controls

Standard Switchable On/Off

Optional PDIM,DDIM,BTTM,CASAMBI,Non Dimmable

Ordering Details

| Code Example: | Name | Watt | CCT | CRI | Angle | Finish | Control |
|---------------|--------------|------|-------|-------|-------|--------|---------|
| | ZuG MPD P 60 | 10W | WW27K | CRI80 | 87° | SWH | On/Off |

Select one from each column with highlighted values to create the ordering code

| NAME | WATT | LUMEN | EFFICACY | CCT | CRI | ANGLE | FINISH | CONTROL |
|--------------|------|-------|----------|-------------|-------|-------|--------|--------------------|
| ZuG MPD P 60 | 10W | 1040 | 105 | 2700K | WW27K | 87° | White | Non Dimmable |
| | | 1069 | 108 | 3000K | WW30K | | Black | Phase Dimmable |
| | | 1119 | 113 | 4000K | NW40K | | | Dali Dimmable |
| | | 1148 | 116 | 5700K | CW57K | | | Bluetooth Dimmable |
| | | | | 2700K-5700K | TW | | | Casambi |
| ZuG MPD P 60 | 10W | | | WW27K | CRI80 | 87° | SWH | On/Off |

