

Ovo Carbon P 75 | 15W

Product Reference

Environment Indoor

Installation Ceiling Suspended

Construction & Materials

Housing Aluminium

Primary Lens PMMA

Primary Reflector PC metallised

Secondary Reflector -

Body Finish White,Black,Custom

Diffuser -

Antiglare Baffle -

Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling

Optical System

Beam Direction Fixed

Tilt No

Swivel No

Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included


Mounting Integral

LED Power Watts 12.8W




System Power Watts 14.7W

Operating Voltage Vin 220-240 Vac

Power Factor p.f. > 0.95

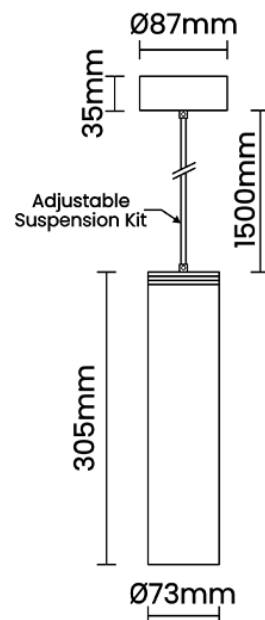

Light Distribution



LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type COB

LED Fitted CREE COB LED 36Vdc/350ma

Controls

Standard Switchable On/Off

Optional PDIM,DDIM,BTTM,CASAMBI,Non Dimmable

Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	Ovo Carbon P 75	15W	WW27K	CRI80	22°(SS)	SWH	On/Off

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT	CRI	ANGLE	FINISH	CONTROL
Ovo Carbon P 75	15W	1312	89	2700K	WW27K	CRI80	White	Non Dimmable
		1352	92	3000K	WW30K	CRI90	Black	Phase Dimmable
		1447	98	4000K	NW40K		Custom	Dali Dimmable

On/Off

PDIM

DDIM

NAME	WATT	LUMEN	EFFICACY	CCT		CRI	ANGLE	FINISH	CONTROL	
		1474	100	5700K	CW57K				Bluetooth Dimmable	BTTM
				2700K-5700K	TW				Casambi	CBTM
				Warm to Dim	W2D					
Ovo Carbon P 75	15W			WW27K		CRI80	22°(SS)	SWH	On/Off	