

Peeping Tom | 5W

Product Reference

Environment Indoor

Installation Ceiling Recess

Construction & Materials

Housing Die Cast Aluminium, Milled Aluminium

Primary Lens PMMA

Primary Reflector PC metallised

Secondary Reflector -

Body Finish White, Black, Custom

Diffuser -

Antiglare Baffle -

Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling

Optical System

Beam Direction Adjustable

Tilt Yes

Swivel Yes

Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included



Mounting Remote

LED Power Watts 3.7W


System Power Watts 4.2W

Operating Voltage Vin 220-240 Vac

Power Factor p.f. > 0.5

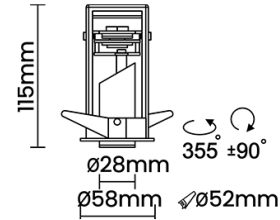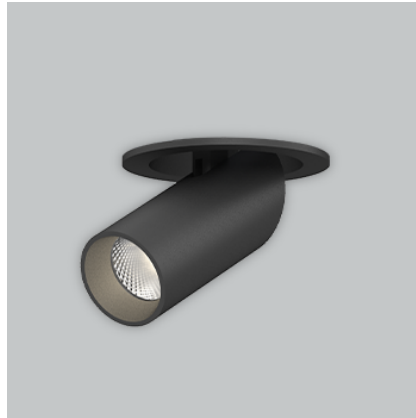

Light Distribution



LED Technology

Binning 3 Step MacAdam

LED Life Time @ L70/B10 >50000 hours

Colour Rendering (CRI) CRI80, CRI90

Led Type COB

LED Fitted CREE COB LED 36Vdc/130mA

Controls

Standard Switchable On/Off

Optional PDIM, DDIM, CASAMBI, Non Dimmable

Ordering Details

| Code Example: | Name | Watt | CCT | CRI | Angle | Finish | Control |
|---------------|--------------------|-----------|--------------|--------------|----------------|------------|---------------|
| | Peeping Tom | 5W | WW27K | CRI80 | 32°(MD) | SWH | On/Off |

Select one from each column with highlighted values to create the ordering code

| NAME | WATT | LUMEN | EFFICACY | CCT | CRI | ANGLE | FINISH | CONTROL |
|--------------------|-----------|-------|----------|--------------|--------------|----------------|------------|--|
| Peeping Tom | 5W | 361 | 86 | 2700K | WW27K | 32°(MD) | White | Non Dimmable Phase Dimmable Dali Dimmable Casambi |
| | | 382 | 91 | 3000K | WW30K | | Black | |
| | | 403 | 96 | 4000K | NW40K | | Custom | |
| | | 416 | 99 | 5700K | CW57K | | CSM | |
| Peeping Tom | 5W | | | WW27K | CRI80 | 32°(MD) | SWH | On/Off |