

# Go Pro 50 PF | 15W

## Product Reference

Environment Indoor  
Installation Ceiling Recess

## Construction & Materials

Housing Die Cast Aluminium  
Primary Lens PMMA  
Primary Reflector -  
Secondary Reflector Anodised  
Body Finish White,Black  
Diffuser -  
Antiglare Baffle -

## Thermal Management


Heat Sink Material Die cast Aluminium  
Cooling Technique Passive Cooling

## Optical System


Beam Direction Fixed  
Tilt No  
Swivel No

## Electrical System

Driven with Constant Current Driver  
Input Voltage/Hz 220V- 240V/50-60Hz  
Control Gear Included  
Mounting Remote  
LED Power Watts 12.4W  
System Power Watts 14.2W  
Operating Voltage Vin 220-240 Vac  
Power Factor p.f. > 0.95

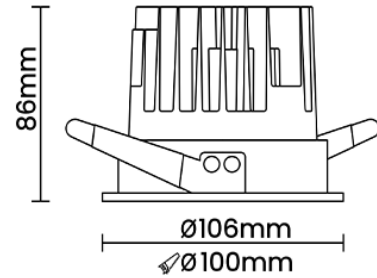

## Light Distribution

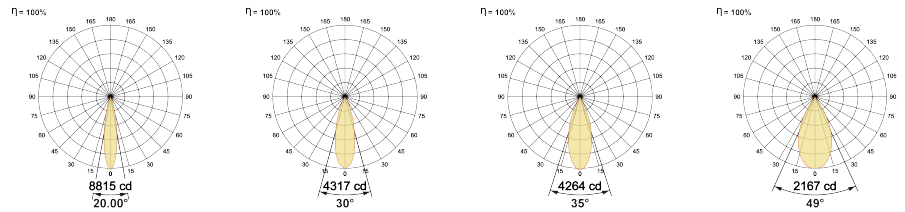

## LED Technology

Binning 3 Step MacAdam  
LED Life Time @ L80/B10 >50000 hours  
Colour Rendering (CRI) CRI80,CRI90  
Led Type COB  
LED Fitted CREE COB LED 36Vdc/350mA

## Controls

Standard Switchable On/Off  
Optional PDIM,DDIM,BTTM,CASAMBI,Non Dimmable

## Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	Go Pro 50 PF	15W	WW27K	CRI80	20°(SS)	SWH	On/Off

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT	CRI	ANGLE	FINISH	CONTROL
Go Pro 50 PF	15W	1392	98	2700K	WW27K	20°(SS)	White SWH	Non Dimmable On/Off
		1434	101	3000K	WW30K	30°(MD)	Black SBL	Phase Dimmable PDIM
		1505	106	4000K	NW40K	35°(WD)		Dali Dimmable DDIM
		1534	108	5700K	CW57K	49°(VWD)	Bluetooth Dimmable BTTM	
				2700K-5700K	TW			Casambi CBTM
						Warm to Dim	W2D	
Go Pro 50 PF	15W			WW27K	CRI80	20°(SS)	SWH	On/Off