

## Go Pro 50 TL | 24W

### Product Reference

Environment Indoor

Installation Ceiling Recess

### Construction & Materials

Housing Die Cast Aluminium

Primary Lens PMMA

Primary Reflector -

Secondary Reflector Anodised

Body Finish White,Black

Diffuser -

Antiglare Baffle -

### Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling

### Optical System

Beam Direction Fixed

Tilt No

Swivel No

### Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included


Mounting Remote

LED Power Watts 20.2W


System Power Watts 23.2W

Operating Voltage Vin 220-240 Vac

Power Factor p.f. > 0.95



### Light Distribution

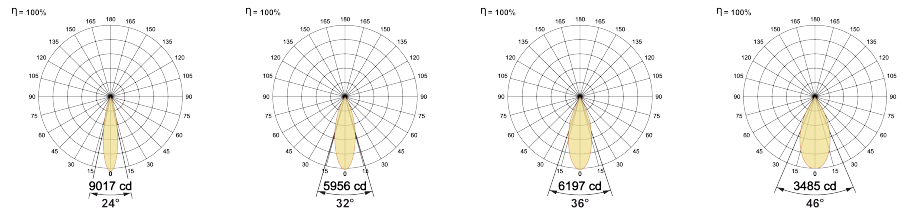

### LED Technology

Binning 3 Step MacAdam

LED Life Time @ L70/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type COB

LED Fitted CREE COB LED 36Vdc/600mA

### Controls

Standard Switchable On/Off

Optional PDIM,DDIM,BTTM,CASAMBI,Non Dimmable

### Ordering Details

| Code Example: | Name         | Watt | CCT   | CRI   | Angle   | Finish | Control |
|---------------|--------------|------|-------|-------|---------|--------|---------|
|               | Go Pro 50 TL | 24W  | WW27K | CRI80 | 24°(SS) | SWH    | On/Off  |

Select one from each column with highlighted values to create the ordering code

| NAME         | WATT | LUMEN | EFFICACY | CCT         | CRI   | ANGLE   | FINISH | CONTROL            |
|--------------|------|-------|----------|-------------|-------|---------|--------|--------------------|
| Go Pro 50 TL | 24W  | 2204  | 95       | 2700K       | WW27K | CRI80   | White  | Non Dimmable       |
|              |      | 2274  | 98       | 3000K       | WW30K | CRI90   | Black  | Phase Dimmable     |
|              |      | 2390  | 103      | 4000K       | NW40K |         |        | Dali Dimmable      |
|              |      | 2436  | 105      | 5700K       | CW57K |         |        | Bluetooth Dimmable |
|              |      |       |          | 2700K-5700K | TW    |         |        | Casambi            |
|              |      |       |          | Warm to Dim | W2D   |         |        |                    |
| Go Pro 50 TL | 24W  |       |          | WW27K       | CRI80 | 24°(SS) | SWH    | On/Off             |