

## Go Pro 35 M | 15W

### Product Reference

Environment Indoor

Installation Ceiling Recess

### Construction & Materials

Housing Die Cast Aluminium

Primary Lens PMMA

Primary Reflector -

Secondary Reflector Anodised

Body Finish White,Black

Diffuser -

Antiglare Baffle -

### Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling

### Optical System

Beam Direction Adjustable

Tilt Yes

Swivel No

### Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included


Mounting Remote

LED Power Watts 12.3W




System Power Watts 14.1W

Operating Voltage Vin 220-240 Vac

Power Factor p.f. &gt; 0.95

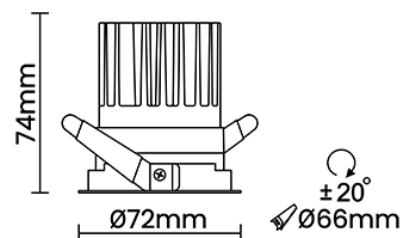

### Light Distribution



### LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 &gt;50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type COB

LED Fitted CREE COB LED 36Vdc/350mA

### Controls

Standard Switchable On/Off

Optional PDIM,DDIM,BTTM,CASAMBI,Non Dimmable

### Ordering Details

| Code Example: | Name               | Watt       | CCT          | CRI          | Angle          | Finish     | Control       |
|---------------|--------------------|------------|--------------|--------------|----------------|------------|---------------|
|               | <b>Go Pro 35 M</b> | <b>15W</b> | <b>WW27K</b> | <b>CRI80</b> | <b>29°(MD)</b> | <b>SWH</b> | <b>On/Off</b> |

Select one from each column with highlighted values to create the ordering code

| NAME               | WATT       | LUMEN | EFFICACY | CCT          | CRI          | ANGLE          | FINISH     | CONTROL            |
|--------------------|------------|-------|----------|--------------|--------------|----------------|------------|--------------------|
| <b>Go Pro 35 M</b> | <b>15W</b> | 1424  | 101      | 2700K        | <b>WW27K</b> | 29°(MD)        | White      | Non Dimmable       |
|                    |            | 1466  | 104      | 3000K        | <b>WW30K</b> |                | Black      | Phase Dimmable     |
|                    |            | 1537  | 109      | 4000K        | <b>NW40K</b> |                |            | Dali Dimmable      |
|                    |            | 1565  | 111      | 5700K        | <b>CW57K</b> |                |            | Bluetooth Dimmable |
|                    |            |       |          | 2700K-5700K  | <b>TW</b>    | 56°(VWD)       |            | Casambi            |
|                    |            |       |          | Warm to Dim  | <b>W2D</b>   |                |            | <b>CBTM</b>        |
| <b>Go Pro 35 M</b> | <b>15W</b> |       |          | <b>WW27K</b> | <b>CRI80</b> | <b>29°(MD)</b> | <b>SWH</b> | <b>On/Off</b>      |