

# Spot On Framer ITA 55 | 18W

## Product Reference

Environment Indoor

Installation Track Mounted

## Construction & Materials

Housing Aluminium

Primary Lens PMMA

Primary Reflector -

Secondary Reflector -

Body Finish Black

Diffuser -

Antiglare Baffle -

## Thermal Management

Heat Sink Material Aluminium

Cooling Technique Passive Cooling

## Optical System

Beam Direction Adjustable

Tilt Yes

Swivel Yes

## Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included


Mounting Remote

LED Power Watts 15.7W


System Power Watts 18.0W

Operating Voltage Vin 220-240 Vac

Power Factor p.f. &gt; 0.95

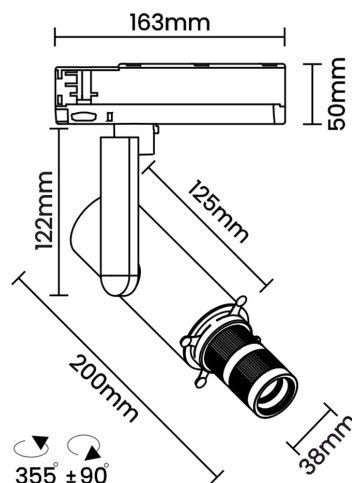

## Light Distribution

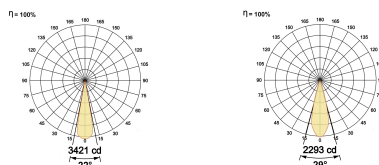

## LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 &gt;50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type COB

LED Fitted Cree COB LED 36Vdc/450mA

## Controls

Standard Switchable On/Off

Optional Non Dimmable

## Ordering Details

| Code Example: | Name                         | Watt       | CCT          | CRI          | Angle          | Finish     | Control       |
|---------------|------------------------------|------------|--------------|--------------|----------------|------------|---------------|
|               | <b>Spot On Framer ITA 55</b> | <b>18W</b> | <b>WW27K</b> | <b>CRI80</b> | <b>22°-29°</b> | <b>SBL</b> | <b>On/Off</b> |

Select one from each column with highlighted values to create the ordering code

| NAME                         | WATT       | LUMEN | EFFICACY | CCT          | CRI          | ANGLE          | FINISH           | CONTROL                    |
|------------------------------|------------|-------|----------|--------------|--------------|----------------|------------------|----------------------------|
| <b>Spot On Framer ITA 55</b> | <b>18W</b> | 468   | 26       | 2700K        | <b>WW27K</b> | <b>22°-29°</b> | Black <b>SBL</b> | Non Dimmable <b>On/Off</b> |
|                              |            | 486   | 27       | 3000K        | <b>WW30K</b> |                |                  |                            |
|                              |            | 522   | 29       | 4000K        | <b>NW40K</b> |                |                  |                            |
|                              |            | 540   | 30       | 5700K        | <b>CW57K</b> |                |                  |                            |
| <b>Spot On Framer ITA 55</b> | <b>18W</b> |       |          | <b>WW27K</b> | <b>CRI80</b> | <b>22°-29°</b> | <b>SBL</b>       | <b>On/Off</b>              |

