

# Mojo 65 48V MD | 18W

## Product Reference

Environment Indoor

Installation Track Mounted

## Construction & Materials

Housing Aluminium

Primary Lens -

Primary Reflector PC metallised

Secondary Reflector Anodised

Body Finish White,Black

Diffuser -

Antiglare Baffle -

## Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling

## Optical System

Beam Direction Adjustable

Tilt Yes

Swivel Yes

## Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 48V

Control Gear Included


Mounting Integral

LED Power Watts 17.8W

System Power Watts -

Operating Voltage Vin 48V

Power Factor p.f. >0.95

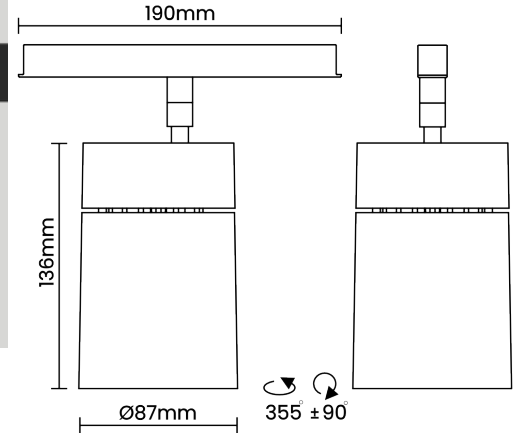

## Light Distribution

### LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type COB

LED Fitted CREE COB LED 33-36Vdc/500mA

### Controls

Standard Switchable On/Off

Optional DDIM,BTTM,CASAMBI

## Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	Mojo 65 48V MD	18W	WW27K	CRI80	27°	SWH	DDIM

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT	CRI	ANGLE	FINISH	CONTROL
Mojo 65 48V MD	18W	1838	103	2700K	WW27K	27°	White	Dali Dimmable
		1899	107	3000K	WW30K		Black	Bluetooth Dimmable
		2000	112	4000K	NW40K			Casambi
		2040	115	5700K	CW57K			
				2700K-5700K	TW			
Mojo 65 48V MD	18W			WW27K	CRI80	27°	SWH	DDIM