

Roa S MPD 120 | 40W

Product Reference

Environment Indoor

Installation Ceiling Surface

Construction & Materials

Housing Extruded Aluminium

Primary Lens -

Primary Reflector -

Secondary Reflector -

Body Finish White,Black,Custom

Diffuser Microprismatic

Antiglare Baffle -

Thermal Management

Heat Sink Material Aluminium

Cooling Technique Passive Cooling

Optical System

Beam Direction General Diffuse

Tilt No

Swivel No

Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included



Mounting Integral

LED Power Watts 34.5W


System Power Watts 39.6W

Operating Voltage Vin 220-240 Vac

Power Factor p.f. > 0.95

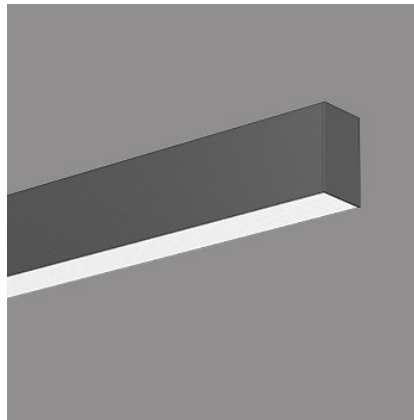

Light Distribution



LED Technology

Binning 3 Step MacAdam

LED Life Time @ L70/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type SMD mid power

LED Fitted Samsung Mid power LED array 32V-36Vdc/1050mA

Controls

Standard Switchable On/Off

Optional DDIM,CASAMBI,Non Dimmable

Ordering Details

| Code Example: | Name | Watt | CCT | CRI | Angle | Finish | Control |
|---------------|----------------------|------------|--------------|--------------|------------|------------|---------------|
| | Roa S MPD 120 | 40W | WW27K | CRI80 | 97° | SWH | On/Off |

Select one from each column with highlighted values to create the ordering code

| NAME | WATT | LUMEN | EFFICACY | CCT | | CRI | ANGLE | FINISH | | CONTROL | |
|----------------------|------------|-------|----------|--------------|--------------|--------------|------------|------------|------------|---------------|---------------|
| Roa S MPD 120 | 40W | 3564 | 90 | 2700K | WW27K | CRI80 | 97° | White | SWH | Non Dimmable | On/Off |
| | | 3683 | 93 | 3000K | WW30K | CRI90 | | Black | SBL | Dali Dimmable | DDIM |
| | | 3881 | 98 | 4000K | NW40K | | | Custom | CSM | Casambi | CBTM |
| | | 3960 | 100 | 5700K | CW57K | | | | | | |
| | | | | 2700K-5700K | TW | | | | | | |
| Roa S MPD 120 | 40W | | | WW27K | | CRI80 | 97° | SWH | | On/Off | |