

Romeo Oval Spot | 15W

Product Reference

Environment Indoor

Installation Ceiling Recess

Construction & Materials

Housing Die Cast Aluminium

Primary Lens PMMA

Primary Reflector -

Secondary Reflector -

Body Finish White,Black,Custom

Diffuser -

Antiglare Baffle -

Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling

Optical System

Beam Direction Fixed

Tilt No

Swivel No

Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included


Mounting Remote

LED Power Watts 12.6W


System Power Watts 14.5W

Operating Voltage V_{in} 220-240 Vac

Power Factor p.f. > 0.95



Light Distribution

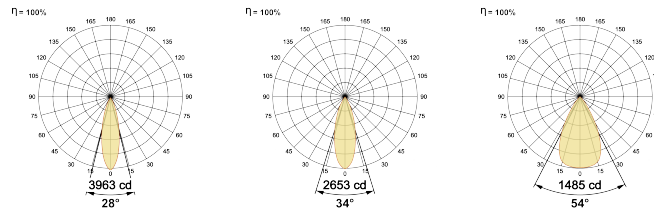

LED Technology

Binning 3 Step MacAdam

LED Life Time @ L70/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type COB

LED Fitted CREE COB LED 36Vdc/350mA

Controls

Standard Switchable On/Off

Optional PDIM,DDIM,BTTM,CASAMBI,Non Dimmable

Ordering Details

| Code Example: | Name | Watt | CCT | CRI | Angle | Finish | Control |
|---------------|------------------------|------------|--------------|--------------|----------------|------------|---------------|
| | Romeo Oval Spot | 15W | WW27K | CRI80 | 28°(MD) | SWH | On/Off |

Select one from each column with highlighted values to create the ordering code

| NAME | WATT | LUMEN | EFFICACY | CCT | | CRI | ANGLE | FINISH | | CONTROL | |
|------------------------|------------|-------|----------|--------------|--------------|--------------|----------------|------------|------------|--------------------|---------------|
| Romeo Oval Spot | 15W | 1233 | 85 | 2700K | WW27K | CRI80 | 28°(MD) | White | SWH | Non Dimmable | On/Off |
| | | 1276 | 88 | 3000K | WW30K | CRI90 | 34°(WD) | Black | SBL | Phase Dimmable | PDIM |
| | | 1334 | 92 | 4000K | NW40K | | 56°(VWD) | Custom | CSM | Dali Dimmable | DDIM |
| | | 1363 | 94 | 5700K | CW57K | | | | | Bluetooth Dimmable | BTTM |
| | | | | | | 2700K-5700K | TW | | | | Casambi |
| | | | | Warm to Dim | W2D | | | | | | |
| Romeo Oval Spot | 15W | | | WW27K | | CRI80 | 28°(MD) | SWH | | On/Off | |