

# iSoft P 112 | 28W

## Product Reference

Environment Indoor

Installation Ceiling Suspended

## Construction & Materials

Housing Extruded Aluminium

Primary Lens -

Primary Reflector -

Secondary Reflector -

Body Finish White,Black,Custom

Diffuser Opal PC

Antiglare Baffle -

## Thermal Management

Heat Sink Material Extruded Aluminium

Cooling Technique Passive Cooling

## Optical System

Beam Direction General Diffuse

Tilt No

Swivel No

## Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included

Mounting Integral

LED Power Watts 23.0W

System Power Watts 26.4W

Operating Voltage  $V_{in}$  220-240 Vac



Power Factor p.f. > 0.95

## Ordering Details


Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	<b>iSoft P 112</b>	<b>28W</b>	<b>WW27K</b>	<b>CRI80</b>	<b>109°</b>	<b>SWH</b>	<b>On/Off</b>

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT	CRI	ANGLE	FINISH	CONTROL
<b>iSoft P 112</b>	<b>28W</b>	2323	88	2700K	<b>WW27K</b>	<b>109°</b>	White	Non Dimmable
		2402	91	3000K	WW30K		Black	Dali Dimmable
		2534	96	4000K	NW40K		Custom	Casambi
		2587	98	5700K	CW57K		CSM	Casambi
<b>iSoft P 112</b>	<b>28W</b>			<b>WW27K</b>	<b>CRI80</b>	<b>109°</b>	<b>SWH</b>	<b>On/Off</b>

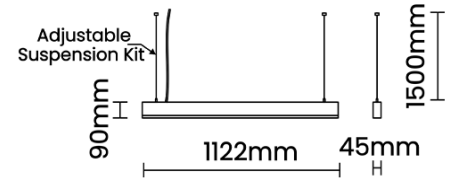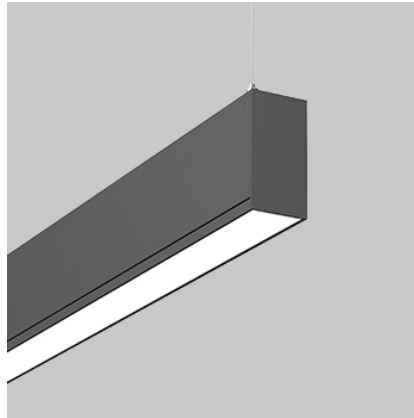

## Light Distribution



## LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type SMD mid power

LED Fitted Osram/Samsung Mid power LED array 34-36Vdc/700mA

## Controls

Standard Switchable On/Off

Optional DDIM,CASAMBI,Non Dimmable