

Luke 75 | 22W

Product Reference

Environment Indoor

Installation Ceiling Recess

Construction & Materials

Housing Mild Steel

Primary Lens -

Primary Reflector PC metallised

Secondary Reflector -

Body Finish White,Black,Custom

Diffuser -

Antiglare Baffle -

Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling

Optical System

Beam Direction Adjustable

Tilt Yes

Swivel Yes

Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included

Mounting Remote

LED Power Watts 18.7W

System Power Watts 21.5W

Operating Voltage V_{in} 220-240 Vac



Power Factor p.f. > 0.95

Ordering Details


Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	Luke 75	22W	WW27K	CRI80	16°(SS)	SWH	On/Off

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT	CRI	ANGLE	FINISH	CONTROL
Luke 75	22W	1935	90	2700K	WW27K	CRI80	16°(SS)	White SWH Non Dimmable On/Off
		2064	96	3000K	WW30K	CRI90	22°(MD)	Black SBL Phase Dimmable PDIM
		2236	104	4000K	NW40K		32°(WD)	Custom CSM Dali Dimmable DDIM
		2301	107	5700K	CW57K			Bluetooth Dimmable BTTM
				2700K-5700K	TW			Casambi CBTM
				Warm to Dim	W2D			
Luke 75	22W			WW27K	CRI80	16°(SS)	SWH	On/Off

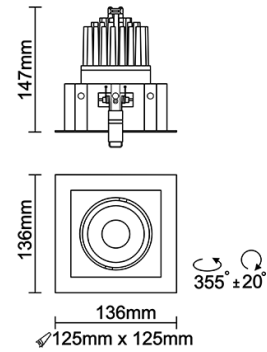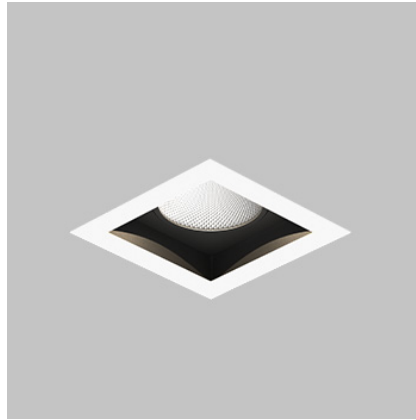

Light Distribution

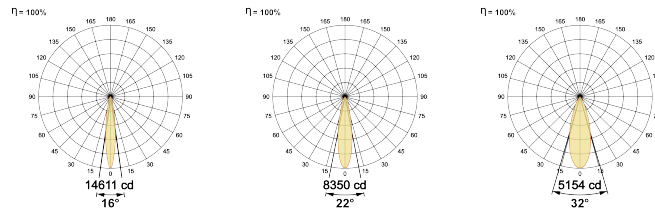

LED Technology

Binning 3 Step MacAdam

LED Life Time @ L70/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type COB

LED Fitted CREE COB LED 36Vdc/500mA

Controls

Standard Switchable On/Off

Optional PDIM,DDIM,BTTM,CASAMBI,Non Dimmable