

# Go Pro 70 ITA | 30W

## Product Reference

Environment Indoor

Installation Track Mounted

## Construction & Materials

Housing Die Cast Aluminium

Primary Lens PMMA

Primary Reflector -

Secondary Reflector Anodised

Body Finish White,Black

Diffuser -

Antiglare Baffle -

## Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling

## Optical System

Beam Direction Adjustable

Tilt Yes

Swivel Yes

## Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included


Mounting Integral

LED Power Watts 25.4W


System Power Watts 29.2W

Operating Voltage  $V_{in}$  220-240 Vac

Power Factor p.f. > 0.95



## Light Distribution

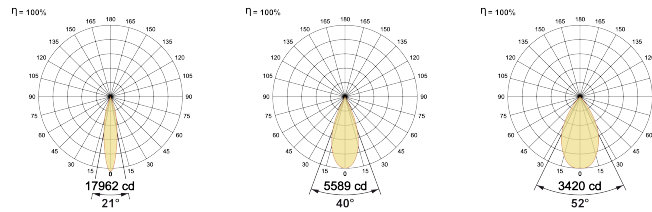

## LED Technology

Binning 3 Step MacAdam

LED Life Time @ L70/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type COB

LED Fitted CREE COB LED 36Vdc/750mA

## Controls

Standard Switchable On/Off

Optional Non Dimmable

## Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	Go Pro 70 ITA	30W	WW27K	CRI80	21°(SS)	SWH	On/Off

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT	CRI	ANGLE	FINISH	CONTROL
Go Pro 70 ITA	30W	2570	88	2700K	WW27K	CRI80	21°(SS)	White SWH
		2657	91	3000K	WW30K	CRI90	40°(MD)	Black SBL
		2803	96	4000K	NW40K		52°(WD)	
		2862	98	5700K	CW57K			
Go Pro 70 ITA	30W			WW27K	CRI80	21°(SS)	SWH	On/Off